


## Measurement and Precision Positioning MICROMETER HEADS



# MICROMETER HEADS

Mitutoyo started business in 1934 as a trailblazing micrometer manufacturer in Japan and celebrated the 80th anniversary of its foundation in October, 2014. Nowadays, Mitutoyo enjoys the confidence of many customers in various fields as a worldwide full-range manufacturer of precision measuring tools and instruments.

Mitutoyo has manufactured micrometer heads since its foundation and established the main production plant at Onomi in Kochi Prefecture in 1977. Designed to mount on measuring instruments and precision fixtures, micrometer heads are used for various purposes including measurement, adjustment and positioning. Recent developments in technology have seen the micrometer head widely utilized in precise feeding devices and cross-travel stages on laser instruments and manipulators, in addition to the usual duties on measurement jigs. In parallel with the application expansion, the customer's needs have increased. To meet customer demand, Mitutoyo provides standard micrometer heads with a choice of measuring range, stem type and body size. Furthermore, high-performance Digimatic Micrometer Head, 0.1mm spindle-pitch models (standard 0.5mm), etc., are now available for the new applications. Mitutoyo also provides customization services for special applications. Micrometer heads with customized spindle tips and precision leadscrews manufactured to customer specification can be supplied even in one-off quantities.

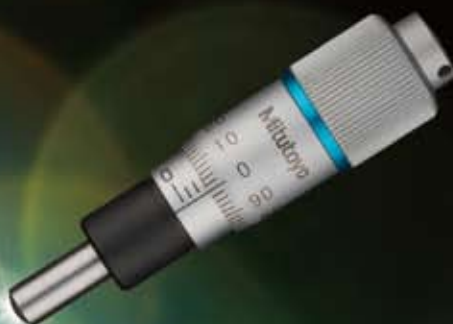


The main production plants for Mitutoyo micrometer heads are Kochi Mitutoyo Corporation Onomi Plant (started operation in 1977) on the upper reaches of the Shimanto River in Shikoku Tosa and Shiwa Production Department (started operation in 1979) in Higashi Hiroshima. Mitutoyo-brand products delivered through leading-edge technologies and facilities are renowned throughout the world as premier products, promoting a sense of confidence in every customer.



Shiwa Production Department



Kochi Mitutoyo Onomi Plant

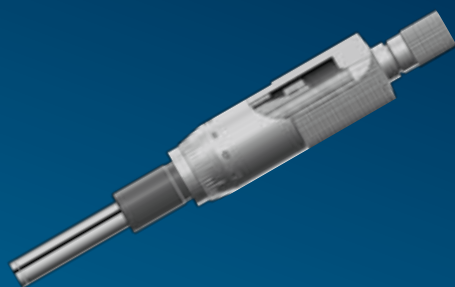


## Selection Guide .....Page 8

Physical characteristics and sizes are listed to aid rapid selection for any particular application. 2D/3D CAD data on heads may be downloaded if required.




## Digimatic heads .....Page 12

Digital readout heads that can output measurement data in Digimatic format to enable incorporation into a process control system. Models **MHN-MX** and **MXN** are waterproof to IP65 level.

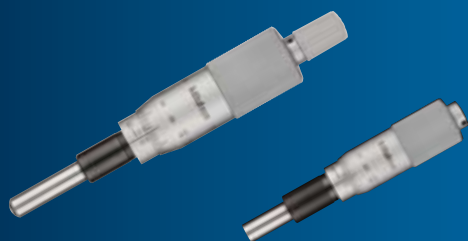


## Standard heads .....Page 16

Standard analog heads offer a choice of measuring range, stem type and body size to suit almost any application.

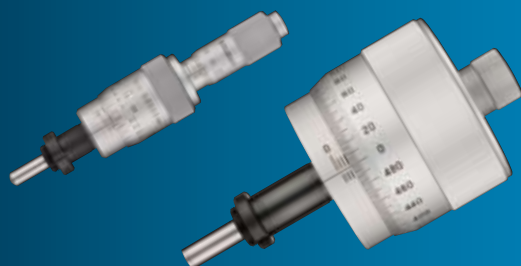

## High Function heads .....Page 32


This type includes non-rotating spindle, quick-operating, fine-adjustment and locking-screw types.

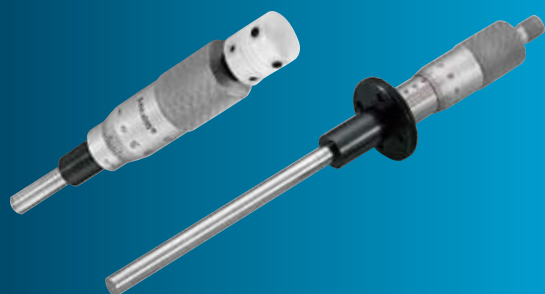

## Special Order heads .....Page 50

Small quantities of heads, even one-offs, can be supplied to meet a customer's specification of features such as type of spindle tip, thimble graduation, custom engraving, etc.

# Micrometer Heads

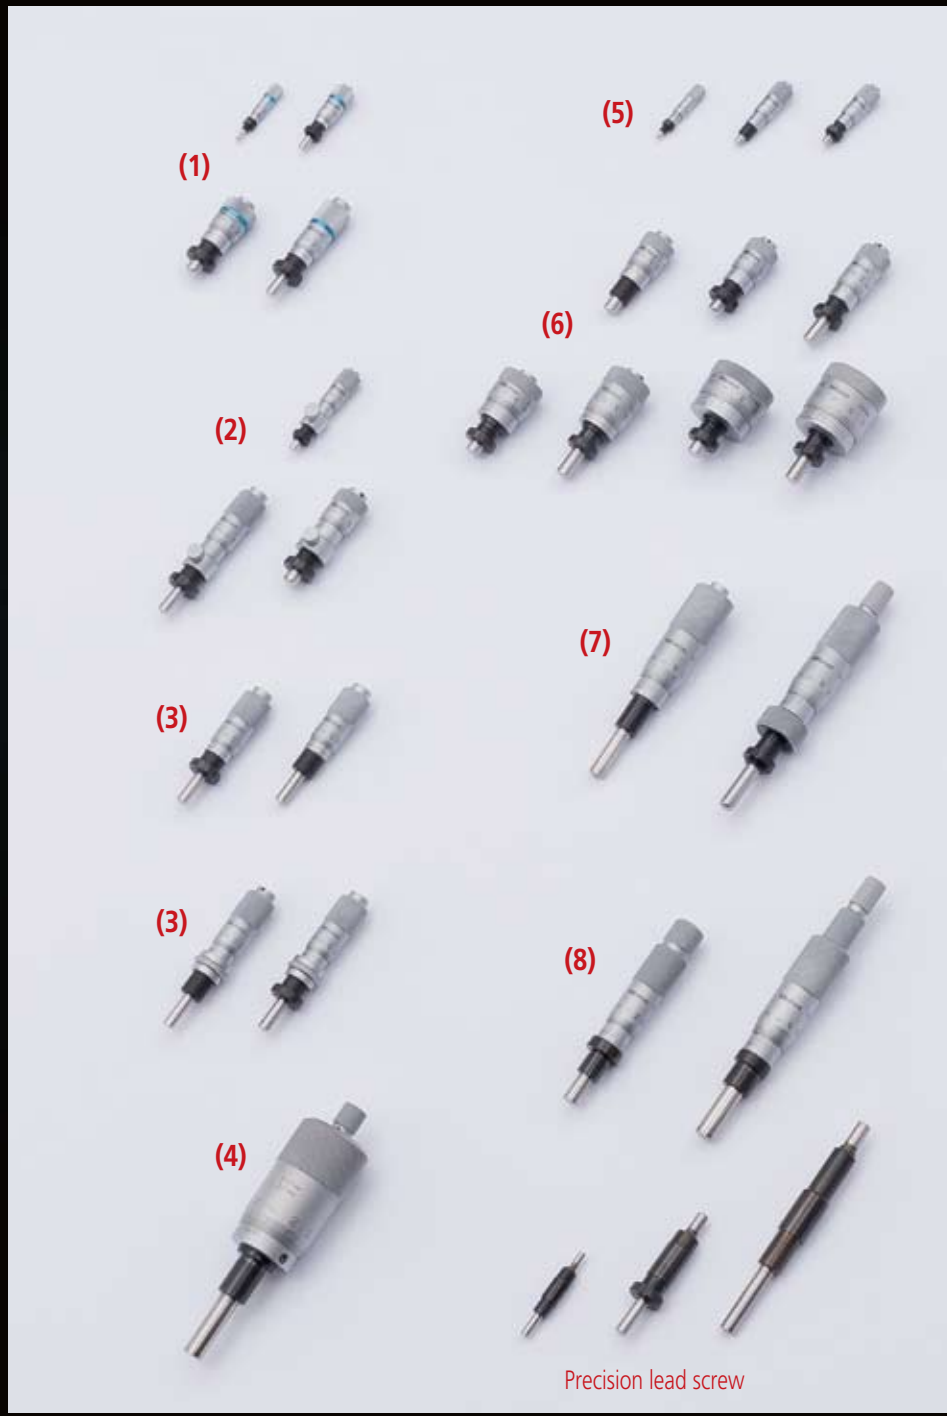

Selection table

Measuring range		Main feature of head		Series	Page
0 - 1mm/0 - .02"	High-Function	Differential Screw Translator (Extra-Fine Feed) Type		110	32
0 - 2.5mm/0 - .05"	High-Function	Fine Spindle Feed of 0.25mm/rev	(11)		32
0 - 5mm/0 - .2"	High-Function	Fine Spindle Feed of 0.1mm/rev	(1)		33, 34
	Standard	Ultra-small / Small Type	(5)		16, 17
0 - 6.5mm/0 - .25"	Standard	Locking-screw Type	(2)		36 - 38
	High-Function	Fine Spindle Feed of 0.1mm/rev	(1)	148	33, 34
	High-Function	Ultra-small / Small Type			35
	Standard	Ultra-small / Small Type	(5)		16, 17
	Standard	Short Body with Choice of Thimble Diameter	(6)		18, 19
0 - 10mm	High-Function	Large Thimble Type for Fine Feed	(13)	152	41, 42
	Standard	Locking-screw Type	(2)		36 - 38
0 - 13mm/0 - .5"		Fine Spindle Feed of 0.25mm/rev		148	35
	High-Function	Fine Spindle Feed of 0.25mm/rev	(11)	110	32
		Short Body with Choice of Thimble Diameter	(6)		18, 19
		Short Body with Choice of Thimble Diameter	(3)	148	20, 21
	Standard	Small Standard Type with Zero-adjustable Thimble	(10)		22, 23



Measuring range	Main feature of head		Series	Page		
0 - 15mm/0- .5"	High-Function	Non-rotating Spindle Type	(8)	153	39	
	High-Function	Quick Spindle Feed of 1mm/rev	(4)	152	40	
	Standard	Small Standard Type with Carbide-Tipped Spindle	(9)	149	24, 25	
0 - 25mm/0- 1"	Digimatic			350	12 - 15	
	High-Function	Non-rotating Spindle Type	(8)	153	39	
		Quick Spindle Feed of 1mm/rev				40
		Large Thimble Type for Fine Feed			152	41, 42
		XY-Stage type	(14)			43
		Fine Graduation and High Accuracy		153	45	
		Digit Counter type		250	45	
Standard	Medium-sized Standard Type	(7)	150	26-28		
0 - 50mm/0- 2"		Medium-sized Standard Type with 8mm diameter spindle		151	29-31	
	Digimatic		(15)	164	12-15	
	High-Function	Quick Spindle Feed of 1mm/rev			152	40
		Large Thimble Type for Fine Feed				41, 42
		Non-rotating Spindle and Large Thimble			197	44
Standard	Medium-sized Standard Type with 8mm diameter spindle	(12)	151	29-31		

# How to View This Catalog

■ Specify this number when ordering

Metric						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
150-192	0 - 25mm	±2μm	10mm	Plain	Flat (carbide tip)	Standard
150-191				W/ clamp nut		
150-209				Plain*		
150-210				W/ clamp nut*		
150-801				Plain	Spherical (SR4) (carbide tip)	
150-802				W/ clamp nut		
150-821				Plain	Reverse reading	
150-822				W/ clamp nut		
150-190				Plain	W/vernier (0.001mm)	
150-189				W/ clamp nut		
150-183**				Plain*	Flat (carbide tip)	
150-184				W/ clamp nut*		
150-196				Plain	w/o ratchet stop	
150-195				W/ clamp nut		
150-211				Plain*		
150-212				W/ clamp nut*		
150-219				Plain	Flat	Long spindle
150-220				W/ clamp nut		
150-803**				Plain*	Spherical (SR4) (carbide tip)	Standard
150-804**				W/ clamp nut*		
150-823**				Plain*	Flat (carbide tip)	Reverse reading
150-824**				W/ clamp nut*		
150-223**	Plain*	Flat	Long spindle			
150-224**	W/ clamp nut*					


\* with spindle lock \*\* made-to-order models

Inch						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
150-208	0 - 1"	±.0001"	.375"	Plain	Flat (carbide tip)	Standard
150-207				W/ clamp nut		
150-213**				Plain*		
150-214**				W/ clamp nut*		
150-811				Plain	Spherical (SR4) (carbide tip)	
150-812				W/ clamp nut		
150-831				Plain	Reverse graduation	
150-832				W/ clamp nut		
150-206				Plain	W/vernier (.0001")	
150-205**				W/ clamp nut		
150-215**				Plain*	Flat (carbide tip)	
150-216**				W/ clamp nut*		
150-198				Plain	w/o ratchet stop	
150-197				W/ clamp nut		
150-217**				Plain*		
150-218**				W/ clamp nut*		
150-221**				Plain	Flat	Long spindle
150-222**				W/ clamp nut		

\* with spindle lock \*\* made-to-order models

## DIMENSIONS

### Plain stem

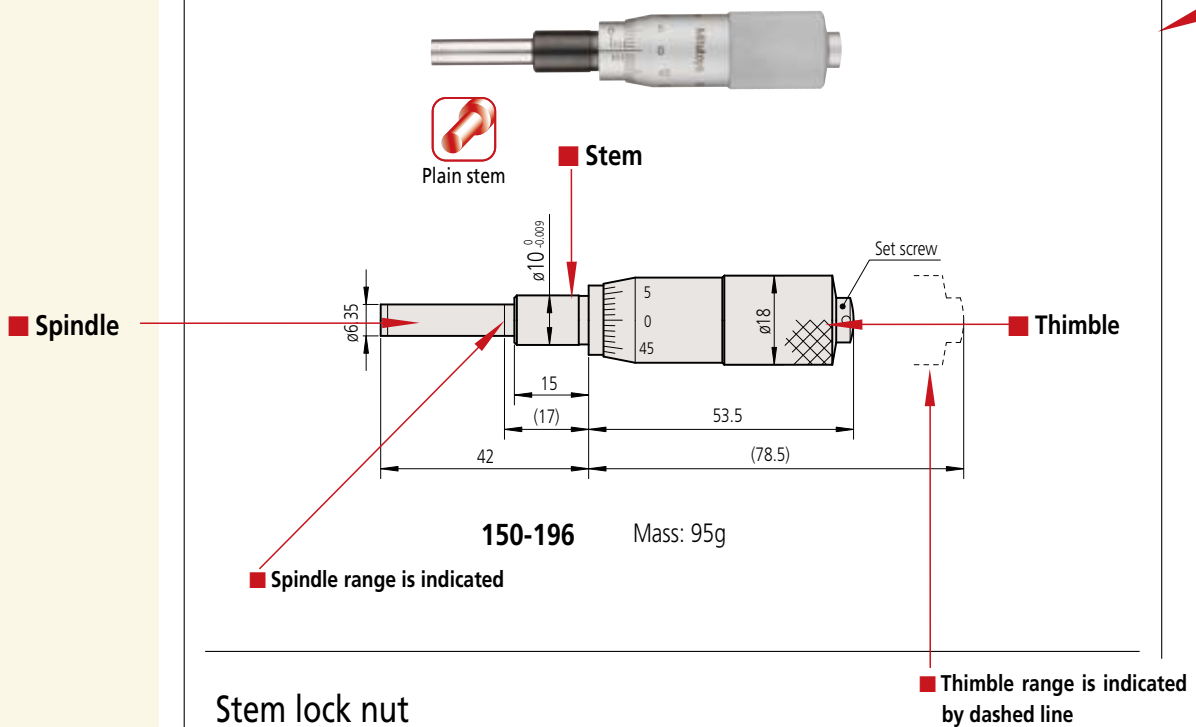

Mitutoyo

Series 150  
Micrometer Heads

Medium-sized  
Standard Type

Most popular small micrometer heads with a measuring range of 25mm. The wide variety of models enables a good match to the application to be achieved.

SPECIFICATIONS


- Measuring range: 0 - 25mm
- Resolution: 0.01mm  
(0.001mm for models with vernier)
- Accuracy: ±2μm  
(Only long spindle model is alloy tool steel)
- Measuring face: Material: Alloy tool steel  
(Only long spindle model is alloy tool steel)  
Hardness: 90HRC or more  
(Only long spindle model is 60HRC or more)
- Scale finishing: Satin-chrome plated

Metric							Inch						
Order No.	Range	Accuracy	Spindle	Stem	Spindle end	Special features	Order No.	Range	Accuracy	Spindle	Stem	Spindle end	Special features
150-192				Plain			150-208				Plain		
150-191				W/ clamp nut	Flat		150-207				W/ clamp nut	Flat	
150-209				Plain*	(carbide tip)	Standard	150-213**				Plain*	(carbide tip)	Standard
150-210				W/ clamp nut*			150-214**				W/ clamp nut*		
150-801				Plain	spherical (3A)		150-811				Plain	spherical (3A)	
150-802				W/ clamp nut	(carbide tip)		150-812				W/ clamp nut	(carbide tip)	
150-821				Plain		Reverse reading	150-831				Plain		Reverse graduation
150-822				W/ clamp nut			150-832				W/ clamp nut		
150-190				Plain			150-206	0 - 1"	±0.001"	3/75"	Plain		
150-189				W/ clamp nut			150-205**				W/ clamp nut		W/vernier (0.001")
150-183**				Plain*	Flat		150-215**				Plain*	Flat	
150-184	0 - 25mm	±2μm	10mm	W/ clamp nut*	(carbide tip)		150-216**				W/ clamp nut*	(carbide tip)	
150-196				Plain			150-198				Plain		
150-195				W/ clamp nut		w/ ratchet stop	150-197				W/ clamp nut		w/ ratchet stop
150-211				Plain*			150-217**				Plain*		
150-212				W/ clamp nut*			150-218**				W/ clamp nut*		
150-219				Plain	Flat	Long spindle	150-221**				Plain	Flat	Long spindle
150-220				W/ clamp nut			150-222**				W/ clamp nut		
150-803**				Plain*	spherical (3A)	Standard							
150-804**				W/ clamp nut*	(carbide tip)								
150-823**				Plain*	Flat	Reverse reading							
150-824**				W/ clamp nut*	(carbide tip)								
150-223**				Plain*	Flat	Long spindle							
150-224**				W/ clamp nut*									


\* with spindle lock \*\* made-to-order models

DIMENSIONS


Plain stem

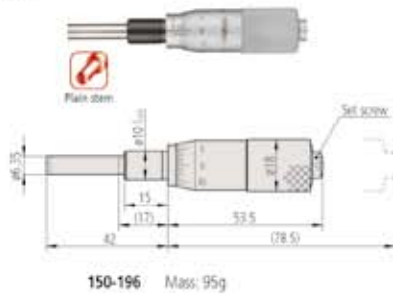

Plain stem and spindle lock

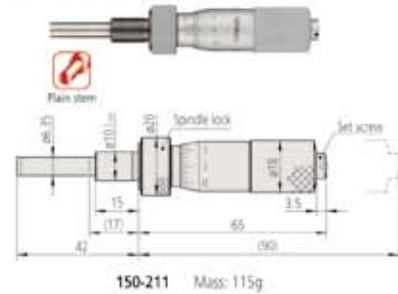

Stem locknut

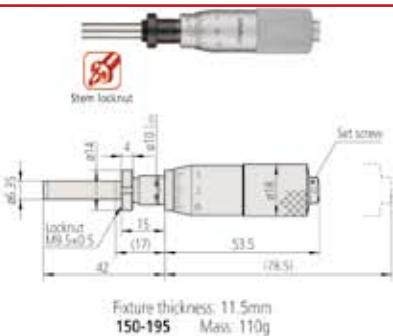

Stem locknut and spindle lock



( ) with spindle fully retracted

- CAD download service at Mitutoyo web site


2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Selection Guide


Key factors in selecting a micrometer head are the measuring range, spindle face, stem, graduations, thimble diameter, etc.

### Stem


#### Plain stem

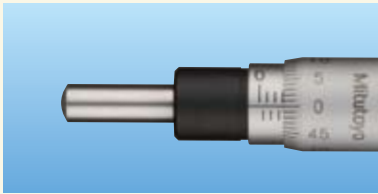


#### Stem locknut type

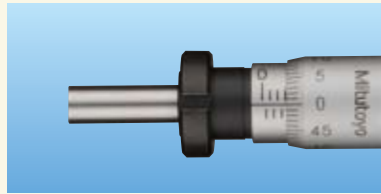

- The stem used to mount a micrometer head is classified as a "plain type" or "clamp nut type" as illustrated above. The stem diameter is manufactured to a nominal Metric or Imperial size with an h6 tolerance.
- The clamp nut stem allows fast and secure clamping of the micrometer head. The plain stem has the advantage of wider application and slight positional adjustment in the axial direction on final installation, although it does require a split-fixture clamping arrangement or adhesive fixing.
- General-purpose mounting fixtures are available as optional accessories.

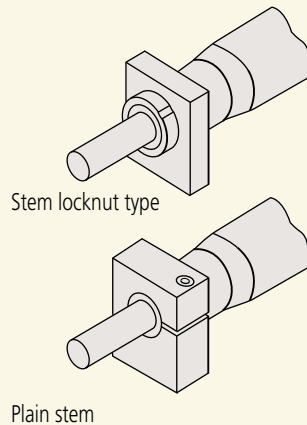

Screw clamp

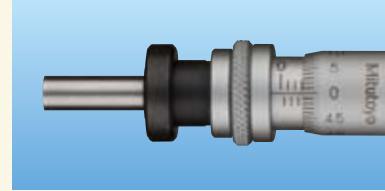


Clamp


- If a micrometer head is used as a stop it is desirable to use a head fitted with a spindle lock so that the setting will not change even under repeated shock loading.

### Measuring Face

#### Flat face




#### Spherical face



#### Anti-rotation device




- A flat measuring face is often specified where a micrometer head is used in measurement applications.
- When a micrometer head is used as a feed device, a spherical face can minimize errors due to misalignment (Figure A). Alternatively, a flat face on the spindle can bear against a sphere, such as a carbide ball (Figure B).
- A non-rotating spindle type micrometer head or one fitted with an anti-rotation device on the spindle (Figure C) can be used if a twisting action on the workpiece must be avoided.
- If a micrometer head is used as a stop then a flat face both on the spindle and the face it contacts provides durability.

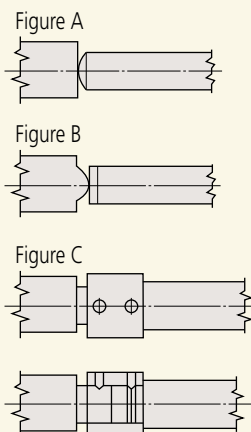


### Measuring Range (Stroke)

- When choosing a measuring range for a micrometer head, allow an adequate margin in consideration of the expected measurement stroke. Six stroke ranges, 5 to 50mm, are available for standard micrometer heads.
- Even if an expected stroke is small, such as 2mm to 3mm, it will be cost effective to choose a 25mm-stroke model as long as there is enough space for installation.
- If a long stroke of over 50mm is required, the concurrent use of a gauge block can extend the effective measuring range. (Figure D)
- In this guide, the range (or stroke end) of the thimble is indicated by a dashed line. For stroke ends, consider the thimble as moving to the position indicated by the line when designing the jig.

Figure D

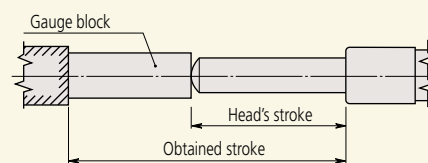




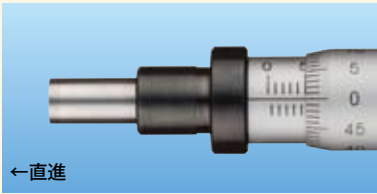

**Non-Rotating Spindle**

- A non-rotating spindle type head does not exert a twisting action on a workpiece, which may be an important factor in some applications.

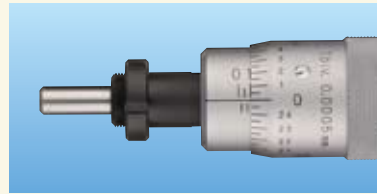


**Ultra-fine Feed Applications**

- Dedicated micrometer heads are available for manipulator applications, etc., which require ultra-fine feed or adjustment of spindle.

**Spindle Thread Pitch**

- The standard type head has 0.5mm pitch.
- 1mm-pitch type: quicker to set than standard type and avoids the possibility of a 0.5mm reading error. Excellent load-bearing characteristics due to larger screw thread.
- 0.25mm or 0.1mm-pitch type  
This type is the best for fine-feed or fine-positioning applications.

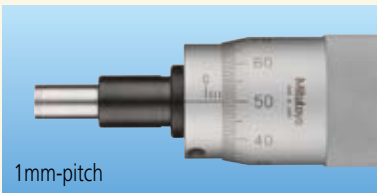


**Constant-force Device**

- A micrometer head fitted with a constant-force device (ratchet or friction thimble) is recommended for measurement applications.
- If using a micrometer head as a stop, or where saving space is a priority, a head without a ratchet is probably the best choice.



Micrometer head with constant-force device





Micrometer head without constant-force device (no ratchet)

**Graduation Styles**


- Care is needed when taking a reading from a mechanical micrometer head, especially if the user is unfamiliar with the model.
- The "normal graduation" style, identical to that of an outside micrometer, is the standard. For this style the reading increases as the spindle retracts into the body.
- On the contrary, in the "reverse graduation" style the reading increases as the spindle advances out of the body.
- The "bidirectional graduation" style is intended to facilitate measurement in either direction by using black numerals for normal, and red numerals for reverse, operation.
- Micrometer heads with a mechanical or electronic digital display, which allow direct reading of a measurement value, are also available. These types are free from misreading errors. A further advantage is that the electronic digital display type can enable computer-based storage and statistical processing of measurement data.

**Thimble Diameter**


- The diameter of a thimble greatly affects its usability and the "fineness" of positioning. A small-diameter thimble allows quick positioning whereas a large-diameter thimble allows fine positioning and easy reading of the graduations. Some models combine the advantages of both features by mounting a coarse-feed thimble (speeder) on the large-diameter thimble.



Normal



Reverse



Bidirectional

## CAD Data Download for Micrometer Heads


2D/3D CAD data files\* of the micrometer heads described in this catalog are available for download from the Mitutoyo home page. The data is supplied in formats common to most CAD systems.

To download, access the "Micrometer Heads" section under "Product Information" and then follow the procedure given below.

2D geometric data: DXF


3D geometric data: IGS / STP

\* For some models only 2D data files are available.



Mitutoyo home page <http://www.mitutoyo.co.jp>.


### Downloading Procedure

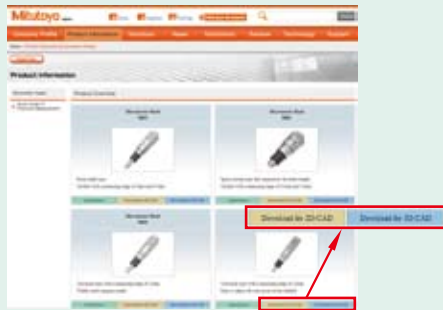

1


Page of product information list  
Click the [2D-CAD Download] or [3D-CAD Download] button for the desired product.

2

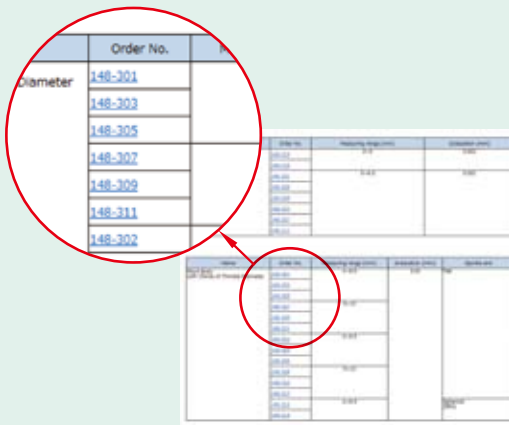

A model listing window will open.  
Click a desired one of products (blue-colored) in the tabulated list.

3

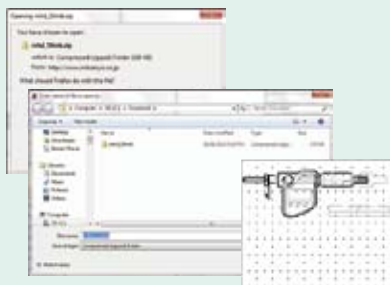

Specify the destination to save and then click the [Save] button.  
The desired CAD data is downloaded to the specified destination.

\* If a PC on WindowsXP SP2 is used, the 'Popup Block' function has been set by default. If this is the case, downloading may not be performed. Use the following method to temporarily disable popup block.

#### Downlading with WindowsXP SP2

Click on the CAD download link portion while holding down the [Ctrl] key on the keyboard. The popup block is temporarily disabled, thus enabling download of the data.

# Contents/Index

## ■ Contents

<b>● Digimatic heads</b>	Page	<b>● Standard heads</b>		<b>● High Function heads</b>	Page	<b>● Special Order heads</b>	Page
Series 164/350 Digimatic Micrometer Heads .....	12~15	Series 148 Ultra-Small Type .....	16, 17	Series 110 Differential Screw Translator (Extra-Fine Feed) Type .....	32	Micrometer Head Mounting Fixtures .....	47, 48
		Series 148 Short Body with Choice of Thimble Diameter .....	18, 19	Series 148 Fine Spindle Feed of 0.1mm/rev .....	33, 34	Guidelines for Self-made Fixtures .....	49
		Series 148 Small Standard Type .....	20, 21	Series 148 Fine Spindle Feed of 0.25mm/rev .....	35	Static Load Test for Micrometer Heads .....	49
		Series 148 Standard Type in Small Size with Zero-adjustable Thimble .....	22, 23	Series 148 Locking-screw Type .....	36~38	Custom-built Products (Product Example Introductions) .....	50, 51
		Small Standard Type with Carbide-tipped Spindle .....	24, 25	Series 153 Non-rotating Spindle Type .....	39		
		Series 150 Medium-sized Standard Type .....	26~28	Series 152 Quick Spindle Feed of 1mm/rev .....	40		
		Series 151 Medium-sized Standard Type with 8mm Diameter Spindle .....	29~31	Series 152 Large Thimble Type for Fine Feed .....	41, 42		
				Series XY-Stage Type .....	43		
				Series 197 Non-rotating Spindle and Large Thimble .....	44		
				Series 153 Fine Graduation and High Accuracy .....	45		
				Digit Counter Type .....	46		
				Precision Leadscrews .....	46		

## ● Applications index

### ● Digimatic heads

Rotating spindle type with digital display for easy reading  
in poorly lit locations or where high resolution is needed ..... 12~15

### ● Standard heads

Lowest cost heads with a wide choice of stroke and size to suit almost any  
application. Stroke X Total length X Thimble Diameter (mm)

	Page
5x32x6 .....	16, 17
6.5x37x9.3 .....	16, 17
6.5x42x15/20/29 .....	18, 19
13x55x15/20/29 .....	18, 19
13x58.5x13 .....	20, 21
13x62x13 .....	22, 23
15x75.5x15 .....	24, 25
25x120.5x18 .....	26~28
25x133x21 .....	29~31
50x191x21 .....	29~31

### ● High Function heads

	Page
● 10-20X finer feed than standard for ultra-precise positioning .....	32
● 5X finer feed than standard provides very precise positioning .....	33, 34
● 2X finer feed than standard provides precise positioning .....	35
● Convenient thumbscrew is provided for where spindle is frequently locked/unlocked .....	36-38
● Non-rotating spindle type for where twisting effect of spindle is undesirable .....	39
● 2X faster feedrate than standard provides quicker feeding/positioning .....	40
● Large thimble type provides higher resolution and readability than standard types .....	41, 42
● Large thimble type with special graduation scheme and quick zero-setting ring to suit XY-stage operation .....	43
● 2X more range and feedrate than standard with non-rotating spindle for where twisting effect of spindle is undesirable .....	44
● Large thimble, non-rotating spindle type provides higher accuracy and resolution than standard types for high-accuracy applications .....	45
● Mechanical counter type for easy digital reading to 0.01mm resolution with graduated sleeve for finer work .....	45

## Series 164/350 Digimatic Micrometer Heads

Data output and digital reading make this type ideal for integrating into SPC systems.

### SPECIFICATIONS

- Measuring face  
Material: Carbide tip  
Hardness: 90HRA or more  
Lapped
- Scale finishing: Satin-chrome plated
- Fixture thickness: 11.5mm (recommended)

The large-character LCD enables easy, error-free reading of measurements to 0.001mm resolution. The spindle feeds at the standard rate of 0.5mm/rev.

Metric									
Order No.	Range	Resolution	Accuracy**	Stem	Stem dia	Spindle end	Graduation features		
164-163	0 - 50mm	—	±3μm	Plain	18mm	Flat (carbide tip)	Standard		
350-251-30	0 - 25mm	0.001mm	±2μm	W/ clamp nut	10mm	Spherical (SR4) (carbide tip)			
350-252-30				Plain					
350-253-30				W/ clamp nut	12mm	Flat (carbide tip)			
350-254-30				Plain					
350-281-30*				W/ clamp nut				Spherical (SR4) (carbide tip)	
350-282-30*				Plain					
350-283-30*				W/ clamp nut	Flat				
350-284-30*				Plain					
350-261-30*									

\* IP65 dust/water protection type

\*\* Excluding quantizing error

Inch/Metric										
Order No.	Range	Resolution	Accuracy**	Stem	Stem dia	Spindle end	Graduation features			
164-164	0 - 2"	.00005"/ 0.001mm	±.0001"	Plain	0.709"	Flat (carbide tip)	Standard			
350-351-30	0 - 1"			.00005"/ 0.001mm	±.0001"	W/ clamp nut		0.375"	Spherical (SR4) (carbide tip)	
350-352-30						Plain				
350-353-30						W/ clamp nut		0.5"	Flat (carbide tip)	
350-354-30						Plain				
350-381-30*						W/ clamp nut				Spherical (SR4) (carbide tip)
350-382-30*						Plain				
350-383-30*						W/ clamp nut		Flat		
350-384-30*						Plain				
350-361-30*										

\* IP65 dust/water protection type


\* Note: Stem diameter of IP65 type is 12mm.

\*\* Excluding quantizing error

### DIMENSIONS

#### Plain stem

Unit: mm

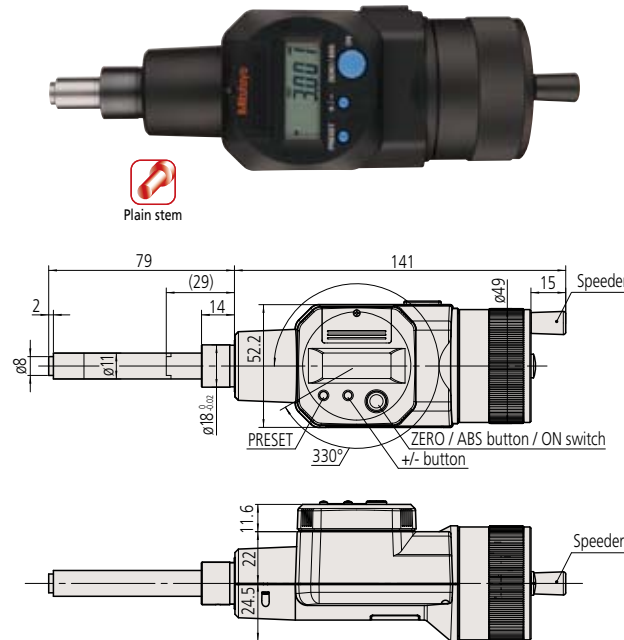

164-163 Rotatable display Mass: 490g

#### Electrical Specifications

	Series 164	Series 350
Power supply	SR44 (2 pcs.), Order No. 938882	SR44 (1 pc), Order No. 938882
Battery life	Approx. 1.8 years under normal use	Approx. 2.4 years under normal use
Scale type	Electromagnetic induction rotary encoder	
Quantizing error	±1 count	

( ) : with spindle fully retracted

**IP Codes**

Level 6: Dustproof.  
No ingress of dust allowed.  
Level 5: Protected against water jets.  
Water projected in jets against the enclosure from any direction shall have no harmful effects.

**Accuracy**

Quantizing error: Excluding ±1 count

**Power supply for Series 350**

SR44 (1 pc), **Order No. 938882**  
(The supplied batteries are used for the monitor)

**Power supply for Series 164**

SR44 (2 pcs.), **Order No. 938882**  
(The supplied batteries are used for the monitor)

**Functions**

**Origin point setting** (ABS measurement system): Resets the ABS origin at the current spindle position to the minimum value of the measuring range and switches to ABS mode.

**Zero-setting** (INC measurement system): A brief press on the ZERO/ABS button sets display to zero at the current spindle position and switches to the incremental (INC) measuring mode. A longer press resets to the ABS measuring mode.

**Data output:** Equipped with output port for transferring measurement data to a Statistical Process Control (SPC) and measurement system.

**Auto power ON/OFF:** The reading on the LCD disappears after this instrument is idle for about 20 minutes, but the reading and measurement mode are retained. Turning the spindle causes the reading on the LCD to reappear.

**Error alarm:** In case of an overflow on the LCD or a computing error, an error message appears on the LCD and the measuring function stops. This prevents an instrument from giving an erroneous reading. Also, when the battery voltage drops to a certain level, the low-battery-voltage alarm annunciator appears well before the micrometer becomes unusable.

**Optional accessories**

Connecting cables for **Series 164**  
1m: **959149**  
2m: **959150**  
**USB Input Tool Direct**  
**USB-ITN-C** (2m): **06ADV380C**  
Connecting cables for U-WAVE-T (for **Series 164**)  
**02AZD790C** 160mm  
For foot switch: **02AZE140C**  
Connecting cables for **350 series**  
1m: **05CZA662**  
2m: **05CZA663**  
**USB Input Tool Direct**  
**USB-ITN-B** (2m): **06ADV380B**  
Connecting cables for U-WAVE-T (for **Series 350**)  
**02AZD790B** 160mm  
For foot switch: **02AZE140B**

**DIMENSIONS**

**Plain stem**

**350-281-30** (Stem dia. 12mm, waterproof type) Mass: 230g

**350-283-30**  
Spherical face  
SR4 \*1

Unit: mm

**350-261-30**  
Equipped with a non-rotating device  
(Stem dia. 12mm, waterproof type)  
Mass: 235g

**350-261-30**  
Bush (standard accessory)

\*1 Other dimensions are the same as **350-281-30**.  
( ) : with spindle fully retracted


**CAD download service at Mitutoyo web site**

2D CAD data can be downloaded at our web site. For details, refer to page 10.


## DIMENSIONS

### Stem locknut

Unit: mm

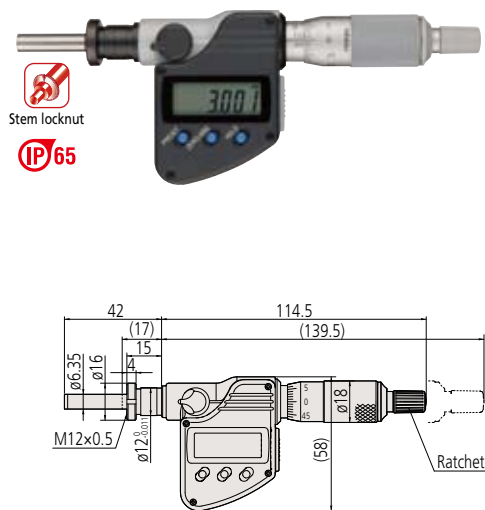


Fixture thickness: 11.5mm  
**350-282-30** (Stem dia. 12mm, equipped with locknut, waterproof type) Mass: 230g

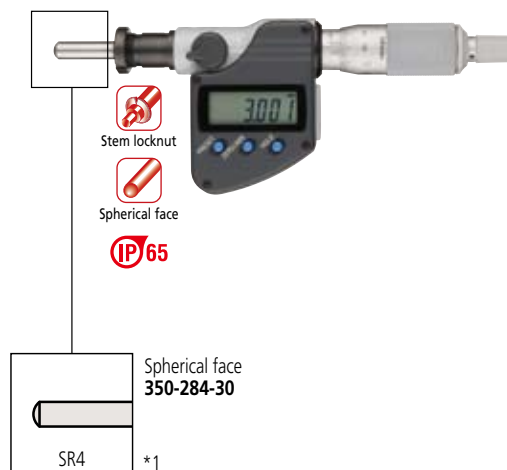


\*1 Other dimensions are the same as **350-282-30**.  
 ( ): with spindle fully retracted

### Plain stem

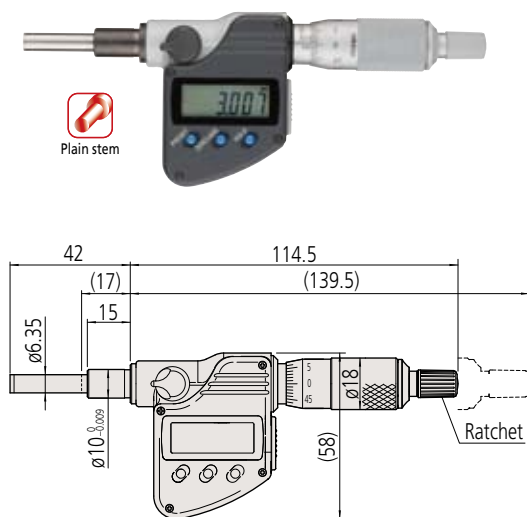

**350-251-30**  
 (Stem dia. 10mm, for general use) Mass: 230g

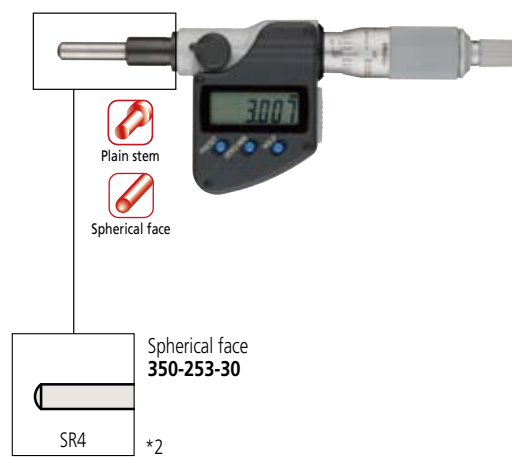


\*2 Other dimensions are the same as **350-251-30**.  
 ( ): with spindle fully retracted

### ● CAD download service at Mitutoyo web site


2D CAD data can be downloaded at our web site. For details, refer to page 10.

Unit: mm

Stem locknut

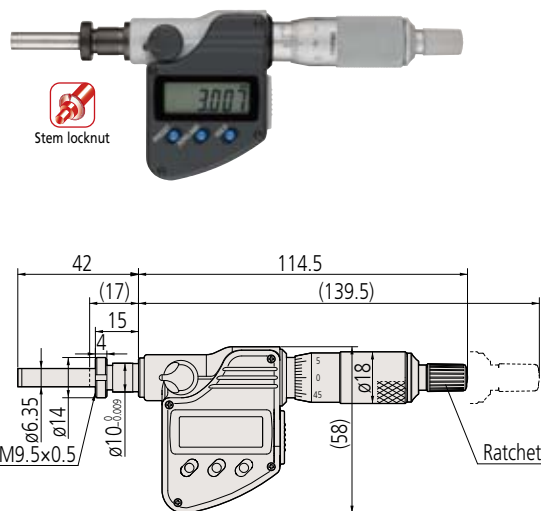

Fixture thickness: 11.5mm  
**350-252-30**  
 (Stem dia. 10mm, for general use) Mass: 230g

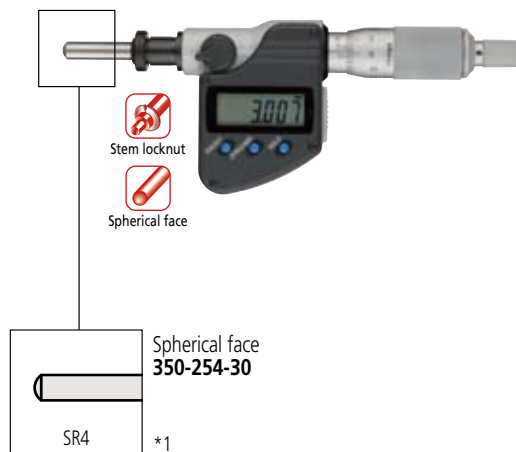

\*1 Other dimensions are the same as **350-252-30**.  
 ( ): with spindle fully retracted

## Series 148 Micrometer Heads Small/Ultra-small Type

Miniature micrometer heads ideal for applications where space is extremely limited.

### SPECIFICATIONS

- Measuring range: 0 - 5mm  
0 - 6.5mm
- Resolution: 0.02mm  
0.01mm
- Accuracy:  $\pm 5\mu\text{m}$
- Measuring face: Material: Alloy tool steel  
Hardness: 60HRC or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Graduation
148-215	0 - 5mm	$\pm 5\mu\text{m}$	3.5mm	Plain	Spherical (SR1.5)	Standard
148-216				W/ clamp nut		
148-201				Plain	Flat	
148-203	W/ clamp nut					
148-205	0 - 6.5mm		6mm	Plain	Spherical (SR3)	
148-207				W/ clamp nut		
148-209		Plain		Flat		
148-211		W/ clamp nut				
						Reverse reading



Inch						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Graduation
148-217	0 - .2"	$\pm .00025"$	.156"	Plain	Spherical (SR1.5)	Standard
148-218				W/ clamp nut		
148-202				Plain	Flat	
148-204	W/ clamp nut					
148-206	0 - .25"		.25"	Plain	Spherical (SR3)	
148-208				W/ clamp nut		
148-210*		Plain		Flat		
148-212*		W/ clamp nut				
						Reverse reading

\* made-to-order models



### DIMENSIONS

#### Plain stem

Unit: mm

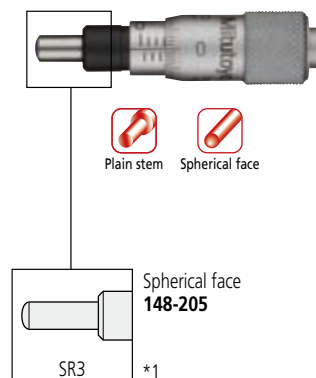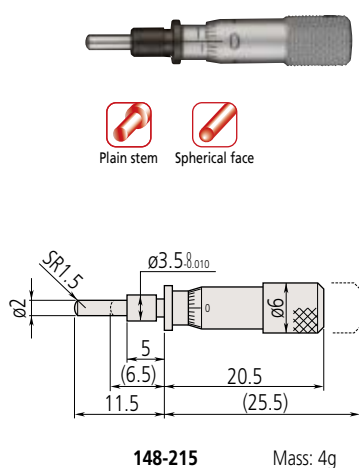

\*1 Other dimensions are the same as 148-201.

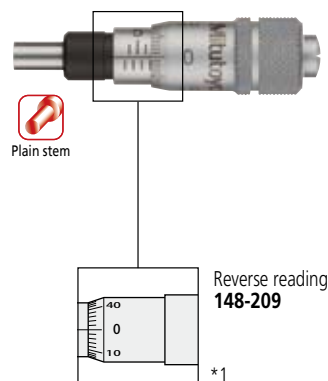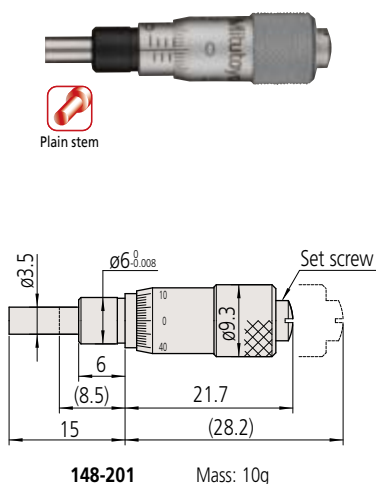



( ) : with spindle fully retracted





**DIMENSIONS**

**Stem locknut**

Unit: mm

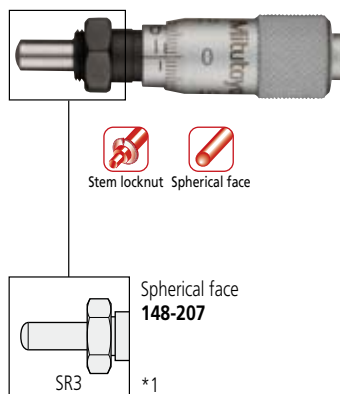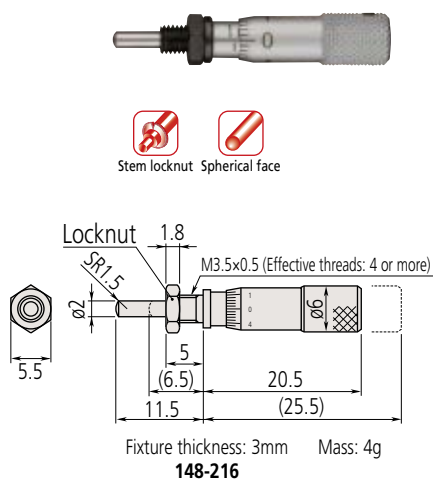

\*1 Other dimensions are the same as **148-203**.

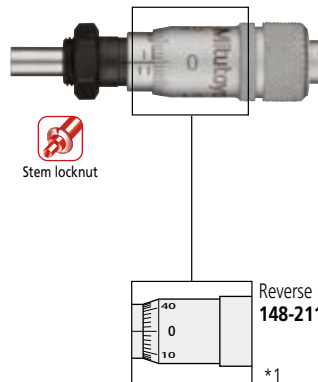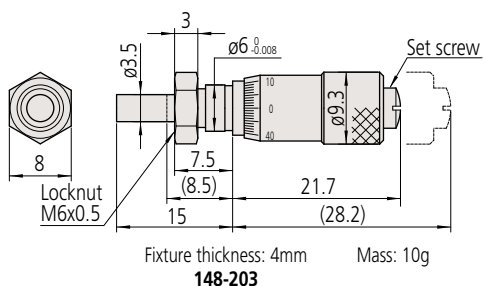

( ): with spindle fully retracted

● **CAD download service at Mitutoyo web site**

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 148 Micrometer Heads

## Short Thimble with Choice of Diameter

The short thimble design with good stroke enables incorporation in equipment where space is limited. Three model variations offer a choice of thimble diameter for best match to the application.


### SPECIFICATIONS

- Measuring range: 0 - 6.5mm  
0 - 13mm
- Resolution: 0.01mm
- Accuracy:  $\pm 2\mu\text{m}$
- Measuring face: Material: Alloy tool steel  
Hardness: 60HRC or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric							Inch						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features	Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
148-301	0 - 6.5mm	$\pm 2\mu\text{m}$	9.5mm	Plain	Flat	15mm thimble dia.	148-351	0 - .25"	$\pm .0001"$	.375"	Plain	Flat	.59" thimble dia.
148-302				W/ clamp nut			148-352				W/ clamp nut		.79" thimble dia.
148-303				Plain			148-353				Plain		1.14" thimble dia.
148-304				W/ clamp nut		148-354	W/ clamp nut				.59" thimble dia.		
148-305				Plain		148-355	Plain				.79" thimble dia.		
148-306				W/ clamp nut		148-356	W/ clamp nut				1.14" thimble dia.		
148-313	0 - 13mm	$\pm 2\mu\text{m}$	9.5mm	Plain	Spherical (SR4)	15mm thimble dia.	148-357	0 - .5"	$\pm .0001"$	.375"	Plain	Flat	.59" thimble dia.
148-314				W/ clamp nut			148-358				W/ clamp nut		.79" thimble dia.
148-307				Plain			148-359				Plain		1.14" thimble dia.
148-308				W/ clamp nut		148-360	W/ clamp nut				.59" thimble dia.		
148-309				Plain		148-361	Plain				.79" thimble dia.		
148-310				W/ clamp nut		148-362	W/ clamp nut				1.14" thimble dia.		
148-311				Plain	Flat	29mm thimble dia.							
148-312				W/ clamp nut									

### DIMENSIONS

#### Plain stem

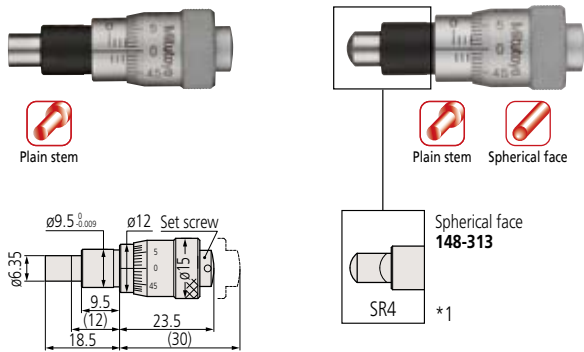


Mass: 26g

148-301 Thimble diameter:  $\phi 15$

\*1 Other dimensions are the same as 148-301.

#### Stem locknut


Unit: mm

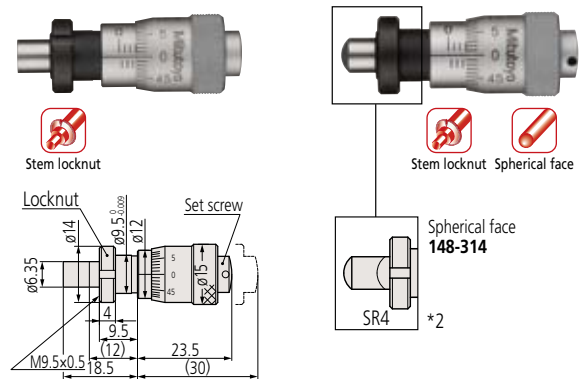

Fixture thickness : 6mm


148-302 Thimble diameter:  $\phi 15$

\*2 Other dimensions are the same as 148-302.

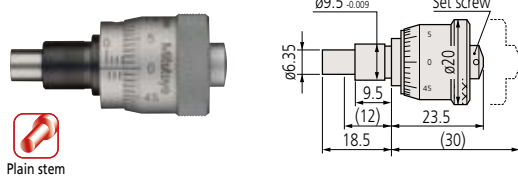


Mass: 39g

148-303 Thimble diameter:  $\phi 20$

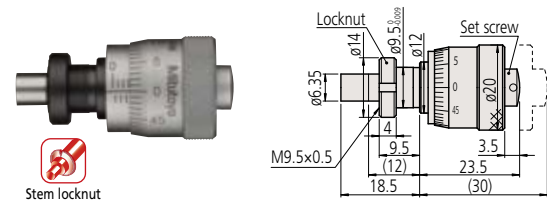


Fixture thickness : 6mm

148-304 Thimble diameter:  $\phi 20$

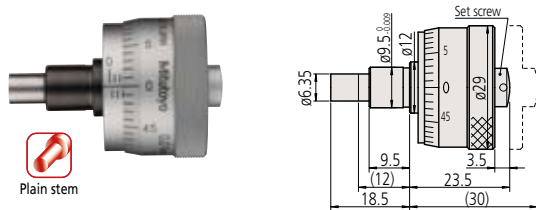

Mass: 71g

148-305 Thimble diameter:  $\phi 29$

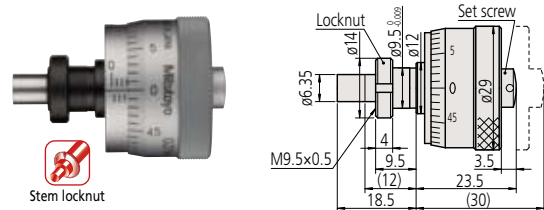

Fixture thickness : 6mm

148-306 Thimble diameter:  $\phi 29$


( ) : with spindle fully retracted

DIMENSIONS

Plain stem



Plain stem




Mass: 35g  
148-307 Thimble diameter:  $\phi 15$

Stem locknut

Unit: mm




Stem locknut



Fixture thickness : 6mm Mass: 35g  
148-308 Thimble diameter:  $\phi 15$




Plain stem



Mass: 55g  
148-309 Thimble diameter:  $\phi 20$




Stem locknut



Fixture thickness : 6mm Mass: 55g  
148-310 Thimble diameter:  $\phi 20$




Plain stem



Mass: 103g  
148-311 Thimble diameter:  $\phi 29$



Stem locknut



Fixture thickness : 6mm Mass: 103g  
148-312 Thimble diameter:  $\phi 29$

( ) : with spindle fully retracted

● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 148 Micrometer Heads Small Standard Type

A small, popular, 13mm-stroke standard micrometer head offering many useful variations including a reverse reading option.

### SPECIFICATIONS

- Measuring range: 0 - 13mm
- Resolution: 0.01mm
- Accuracy:  $\pm 2\mu\text{m}$
- Measuring face: Material: Alloy tool steel  
Hardness: 60HRC or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Graduation features
148-104	0 - 13mm	$\pm 2\mu\text{m}$	9.5mm	Plain	Flat	Standard
148-103				W/ clamp nut		
148-121				Plain*		
148-120				W/ clamp nut*		
148-801				Plain		
148-802				W/ clamp nut		
148-803				Plain*	Spherical (SR4)	
148-804				W/ clamp nut*		
148-821				Plain		
148-822				W/ clamp nut		
148-823				Plain*		
148-824				W/ clamp nut*		

\* with spindle lock

Inch						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Graduation features
148-112	0 - .5"	$\pm .0001"$	.375"	Plain	Flat	Standard
148-111**				W/ clamp nut		
148-123				Plain*		
148-122				W/ clamp nut*		
148-811				Plain		
148-812				W/ clamp nut		
148-813				Plain*	Spherical (SR4)	
148-814				W/ clamp nut*		
148-831				Plain		
148-832				W/ clamp nut		
148-833				Plain*		
148-834				W/ clamp nut*		




\* with spindle lock

\*\* made-to-order model

### DIMENSIONS




#### Plain stem

Unit: mm

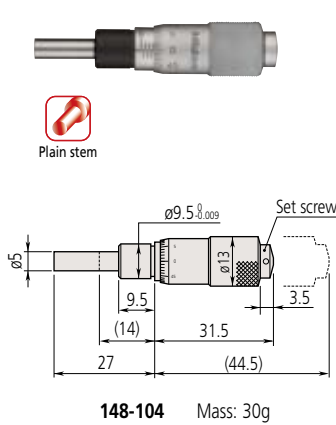

\*1 Other dimensions are the same as 148-104.

#### Plain stem and spindle lock

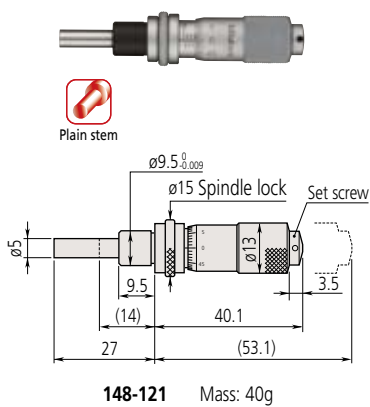


\*2 Other dimensions are the same as 148-121.  
( ): with spindle fully retracted



**DIMENSIONS**

Unit: mm

**Stem locknut**

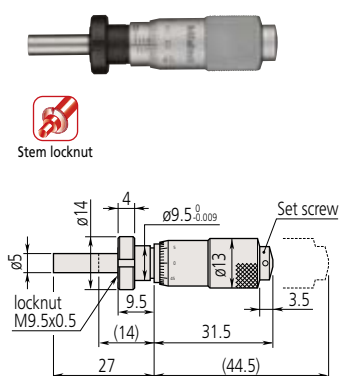


Fixture thickness: 6mm  
**148-103** Mass: 35g





\*1 Other dimensions are the same as **148-103**.

**Stem locknut and spindle lock**

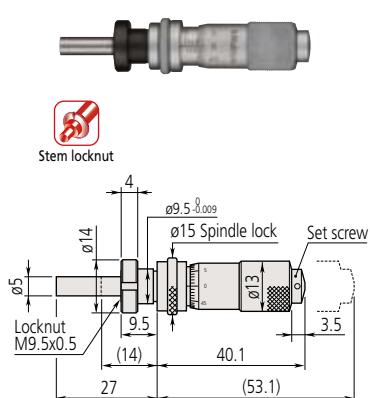

Fixture thickness: 6mm  
**148-120** Mass: 45g

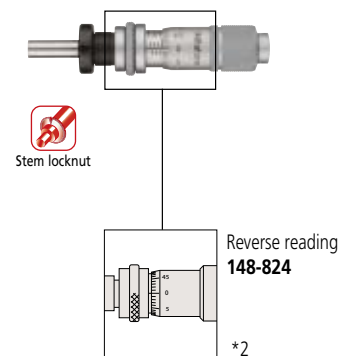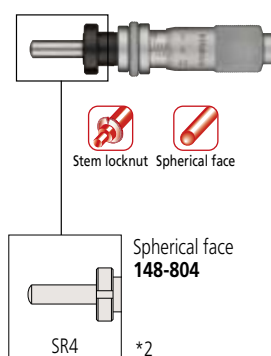

\*2 Other dimensions are the same as **148-120**.  
 ( ): with spindle fully retracted

● **CAD download service at Mitutoyo web site**

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 148 Micrometer Heads

### Small Thimble Diameter Standard Type

A small, 13mm-stroke standard micrometer head with zero point adjustment on the thimble. Variations include a reverse reading option and an all-stainless-steel model.

### SPECIFICATIONS

- Measuring range: 0 - 13mm
- Resolution: 0.01mm
- Accuracy:  $\pm 2\mu\text{m}$
- Measuring face: Material: Alloy tool steel  
Hardness: 60HRC or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
148-503	0 - 13mm	$\pm 2\mu\text{m}$	9.5mm	Plain	Flat	Standard
148-513				W/ clamp nut		Stainless steel throughout
148-508				Plain*	Standard	
148-506				W/ clamp nut*		
148-504				Plain	Spherical (SR4)	
148-853				W/ clamp nut*		
148-854				Plain	Flat	
148-863				W/ clamp nut*		
148-864				W/ clamp nut	Reverse reading	
148-518**				W/ clamp nut		
148-858**				W/ clamp nut	Spherical (SR4)	
148-866**				Plain*		
148-856**				Plain*	Spherical (SR4)	
148-868**				W/ clamp nut		

\* with spindle lock \*\* made-to-order models


Inch						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
148-501	0 - .5"	$\pm .0001"$	.375"	Plain	Flat	Standard
148-511**				W/ clamp nut		Stainless steel throughout
148-507**				Plain*	Standard	
148-505				W/ clamp nut*		
148-502				Plain	Spherical (SR4)	
148-851				W/ clamp nut*		
148-852				Plain	Flat	
148-861				W/ clamp nut*		
148-862				W/ clamp nut*	Reverse reading	

\* with spindle lock \*\* made-to-order models


### DIMENSIONS

#### Plain stem


Unit: mm

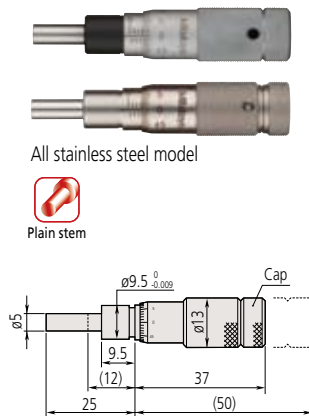

148-503 Mass: 35g  
148-513 All stainless steel model

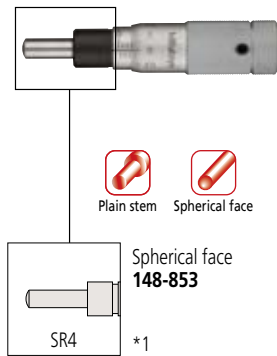


Spherical face  
148-853  
SR4 \*1

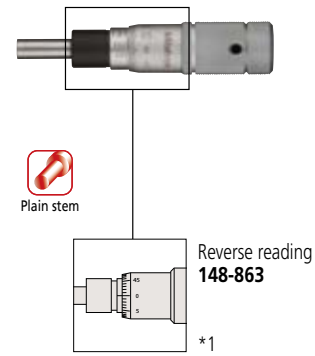


Reverse reading  
148-863  
\*1

\*1 Other dimensions are the same as 148-503.


#### Plain stem and spindle lock

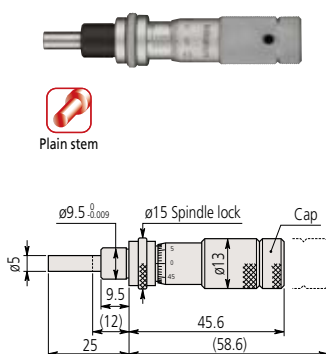

148-506 MHA1-13  
Mass: 35g



Spherical face  
148-856  
SR4 \*2



Reverse reading  
148-866  
\*2

\*2 Other dimensions are the same as 148-506.  
( ) : with spindle fully retracted

## DIMENSIONS

### Stem locknut


Unit: mm



All stainless steel model




Stem locknut



Fixture thickness: 6mm Mass: 40g  
**148-508**  
**148-518** All stainless steel model



Stem locknut Spherical face




Spherical face  
**148-858**

\*1



Stem locknut



Reverse reading  
**148-868**


\*1

\*1 Other dimensions are the same as **148-508**.


### Stem locknut and spindle lock




Stem locknut



Fixture thickness: 6mm Mass: 40g  
**148-504**




Stem locknut Spherical face




Spherical face  
**148-854**

\*2



Stem locknut



Reverse reading  
**148-864**

\*2

\*2 Other dimensions are the same as **148-504**.  
 ( ): with spindle fully retracted

### ● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 149 Micrometer Heads Small Standard Type with Carbide-Tipped Spindle

A small, 15mm-stroke standard micrometer head featuring a carbide-tipped spindle and useful variations including a reverse reading option.

### SPECIFICATIONS

- Measuring range: 0 - 15mm
- Resolution: 0.01mm
- Accuracy:  $\pm 2\mu\text{m}$
- Measuring face: Material: Carbide tip  
Hardness: 90HRA or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric							
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Graduation features	
149-132	0 - 15mm	$\pm 2\mu\text{m}$	9.5mm	Plain	Flat (carbide tip)	Standard	
149-131				W/ clamp nut			
149-183				Plain*			
149-184				W/ clamp nut*			
149-801				Plain			Spherical (SR4)(carbide tip)
149-802				W/ clamp nut			
149-821				Plain	Flat (carbide tip)	Reverse reading	
149-822				W/ clamp nut			
149-803**				Plain*	Spherical (SR4)(carbide tip)	Standard	
149-804**				W/ clamp nut*			
149-823**				Plain*	Flat (carbide tip)	Reverse reading	
149-824**				W/ clamp nut*			

\* with spindle lock \*\* made-to-order models

Inch							
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Graduation features	
149-148	0 - .5"	$\pm .0001$ "	.375"	Plain	Flat (carbide tip)	Standard	
149-147				W/ clamp nut			
149-185***				Plain*			
149-182				W/ clamp nut*			
149-811				Plain			Spherical (SR4) (carbide tip)
149-812				W/ clamp nut			
149-831**				Plain	Flat (carbide tip)	Reverse reading	
149-832**				W/ clamp nut			
149-181**				Plain*	Standard		




\* with spindle lock \*\* made-to-order model

\*\*\* w/ratchet (149-181) is available

### DIMENSIONS




#### Plain stem

Unit: mm

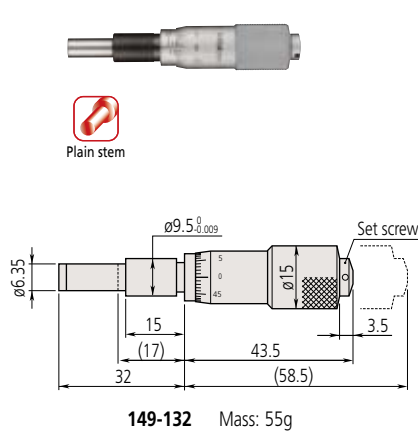

\*1 Other dimensions are the same as 149-132.

#### Plain stem and spindle lock

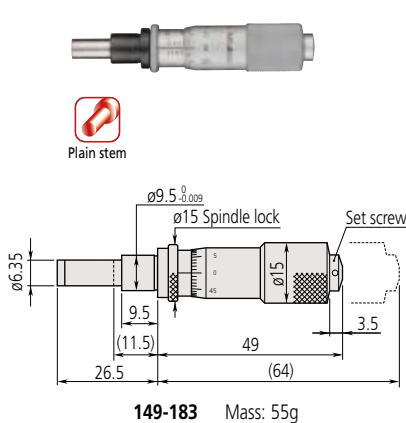


\*2 Other dimensions are the same as 149-183.  
( ): with spindle fully retracted





**DIMENSIONS**

Unit: mm

**Stem locknut**

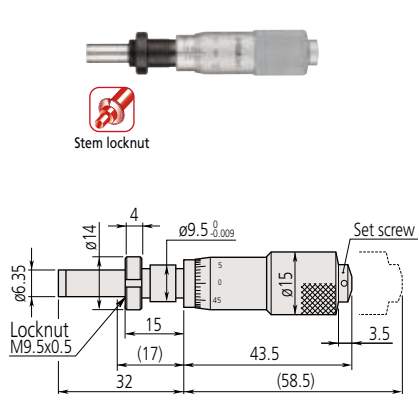


Fixture thickness: 11.5mm  
**149-131** Mass: 60g





\*1 Other dimensions are the same as **149-131**.

**Stem locknut and spindle lock**

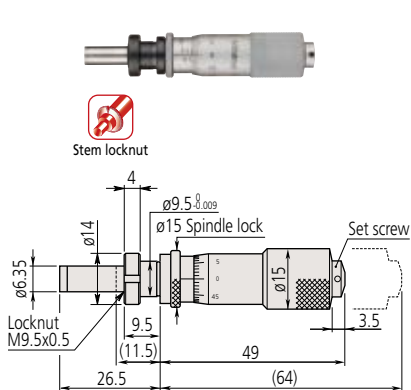

Fixture thickness: 6mm  
**149-184** Mass: 60g



\*2 Other dimensions are the same as **149-184**.  
( ): with spindle fully retracted

● **CAD download service at Mitutoyo web site**

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 150 Micrometer Heads

## Medium-sized Standard Type

Most popular small micrometer heads with a measuring range of 25mm. The wide variety of models enables a good match to the application to be achieved.

### SPECIFICATIONS

- Measuring range: 0 - 25mm
- Resolution: 0.01mm  
(0.001mm for models with vernier)
- Accuracy:  $\pm 2\mu\text{m}$
- Measuring face: Material: Alloy tool steel  
(Only long spindle model is alloy tool steel)  
Hardness: 90HRC or more  
(Only long spindle model is 60HRC or more)  
Lapped
- Scale finishing: Satin-chrome plated


Metric								Inch							
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features		Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features	
150-192	0 - 25mm	$\pm 2\mu\text{m}$	10mm	Plain	Flat (carbide tip)	Standard		150-208	0 - 1"	$\pm .0001"$	.375"	Plain	Flat (carbide tip)	Standard	
150-191				W/ clamp nut			150-207	W/ clamp nut							
150-209				Plain*			150-213**	Plain*							
150-210				W/ clamp nut*			150-214**	W/ clamp nut*							
150-801				Plain			150-811	Plain							
150-802				W/ clamp nut			150-812	W/ clamp nut							
150-821				Plain			150-831	Plain							
150-822				W/ clamp nut			150-832	W/ clamp nut							
150-190				Plain			150-206	Plain							
150-189				W/ clamp nut			150-205**	W/ clamp nut							
150-183**				Plain*			150-215**	Plain*							
150-184				W/ clamp nut*			150-216**	W/ clamp nut*							
150-196				Plain			150-198	Plain							
150-195				W/ clamp nut			150-197	W/ clamp nut							
150-211				Plain*			150-217**	Plain*							
150-212				W/ clamp nut*			150-218**	W/ clamp nut*							
150-219				Plain			150-221**	Plain							
150-220				W/ clamp nut			150-222**	W/ clamp nut							
150-803**				Plain*			Spherical (SR4) (carbide tip)	Standard							
150-804**				W/ clamp nut*											
150-823**				Plain*			Flat (carbide tip)	Reverse reading							
150-824**				W/ clamp nut*											
150-223**	Plain*	Flat	Long spindle												
150-224**	W/ clamp nut*														

\* with spindle lock \*\* made-to-order models

\* with spindle lock \*\* made-to-order models


### DIMENSIONS

#### Plain stem

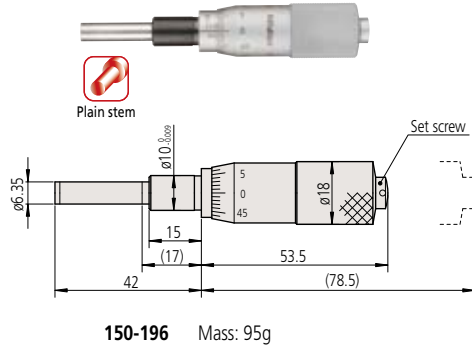


#### Plain stem and spindle lock


Unit: mm

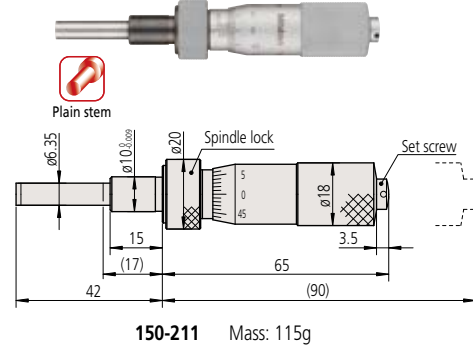

#### Stem locknut

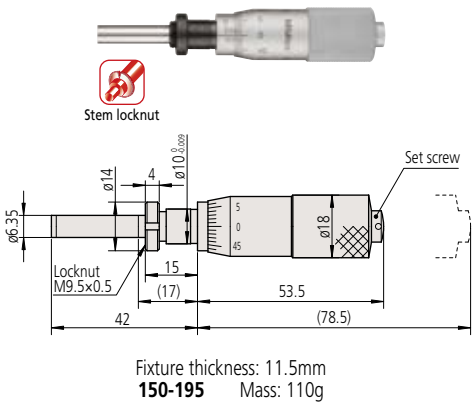

#### Stem locknut and spindle lock

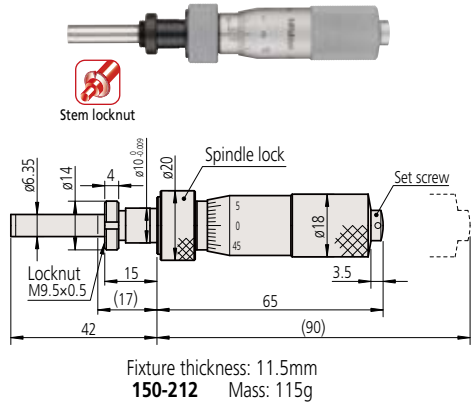

( ): with spindle fully retracted


#### ● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.





**DIMENSIONS**

**Plain stem**

( ) : with spindle fully retracted Unit: mm

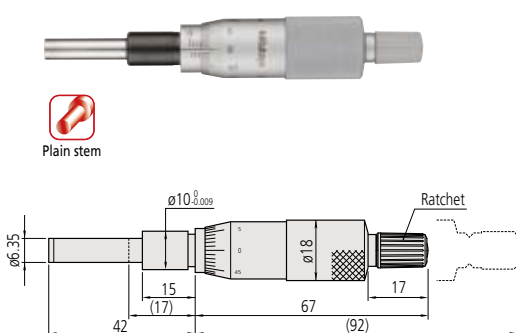


**150-192** Mass: 95g

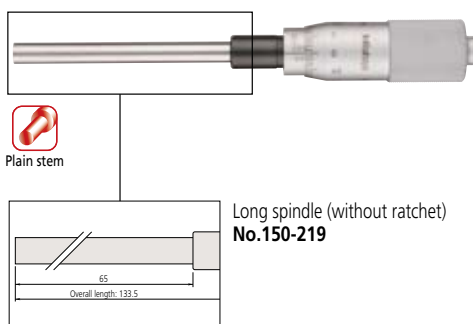
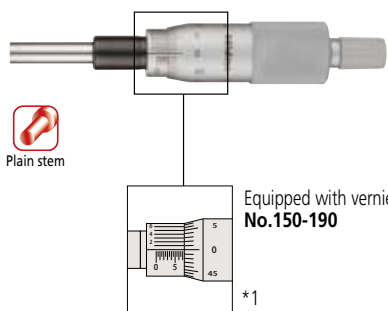
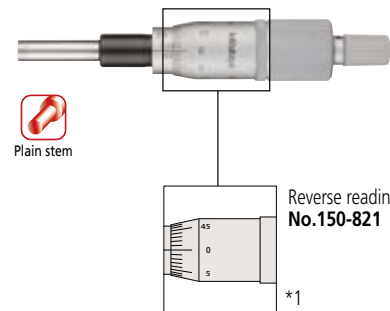
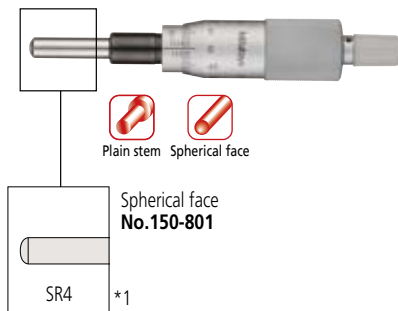


\*1 Other dimensions are the same as **150-192**.

**Stem locknut**

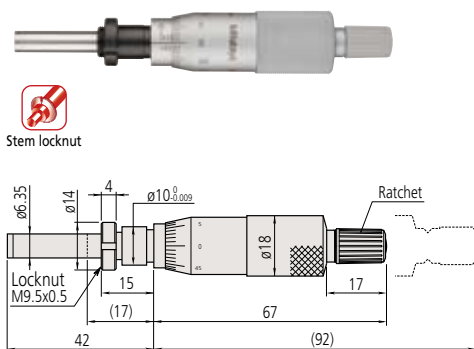

Fixture thickness: 11.5mm  
**150-191** Mass: 100g

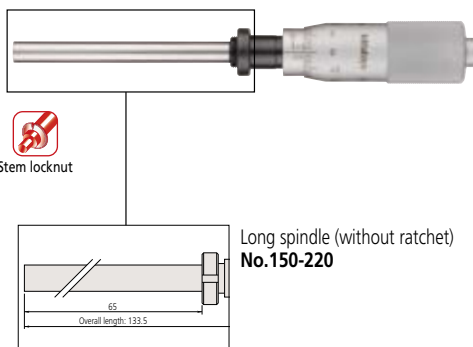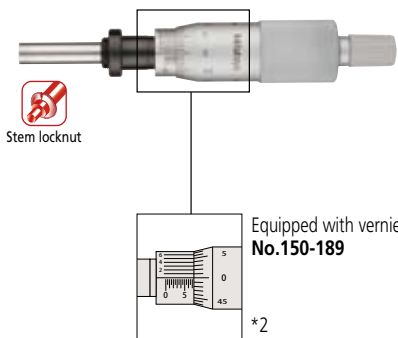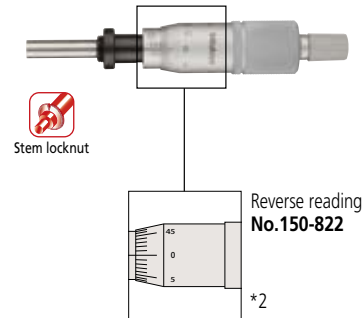


\*2 Other dimensions are the same as **150-191**.

## DIMENSIONS


### Plain stem and spindle lock

( ) : with spindle fully retracted Unit: mm

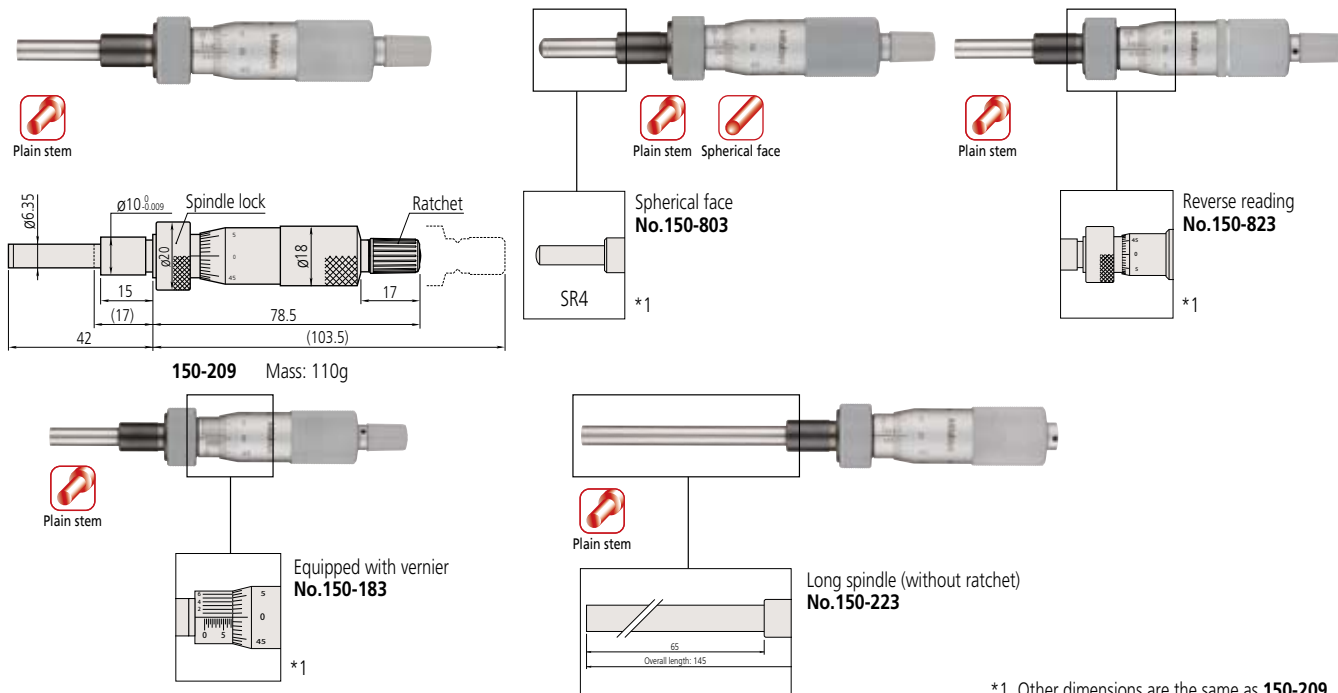

\*1 Other dimensions are the same as 150-209.

### Stem locknut and spindle lock

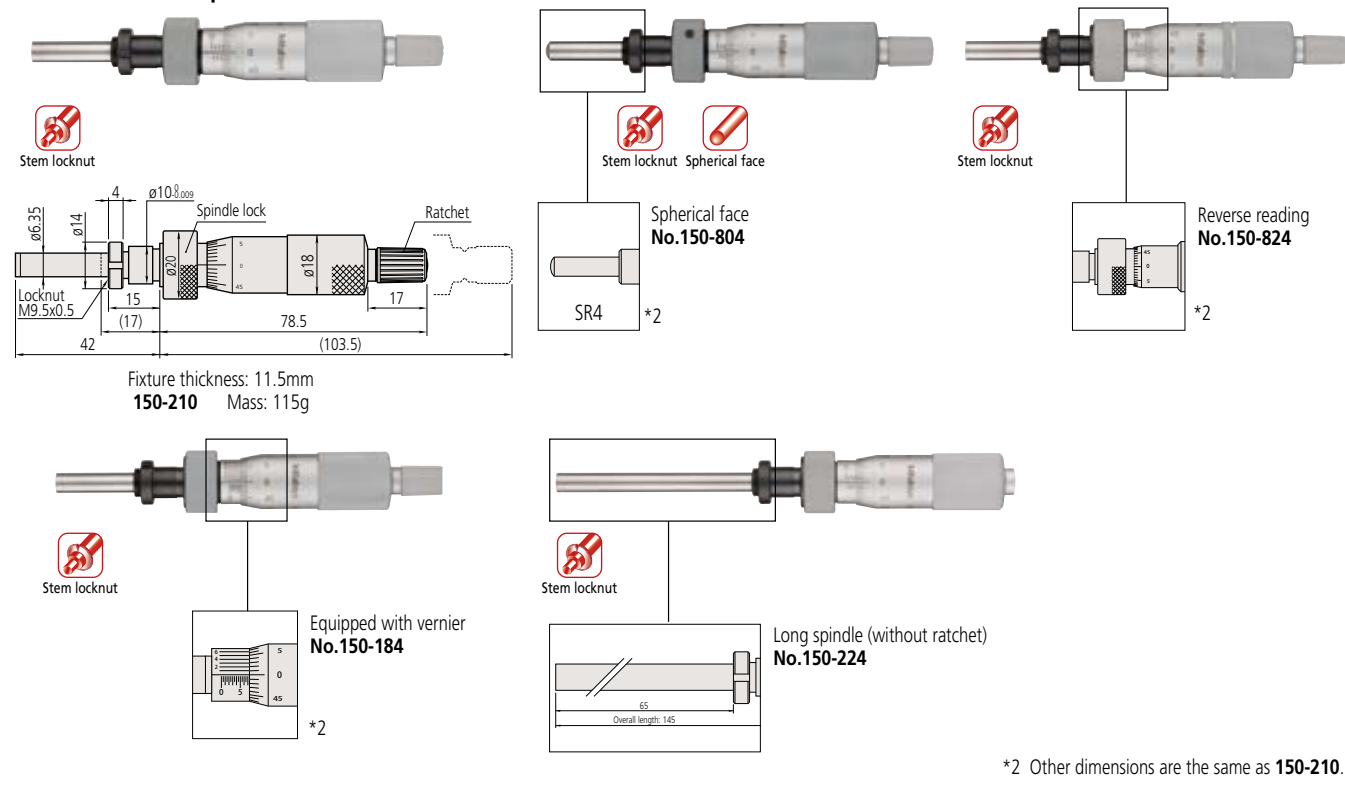

\*2 Other dimensions are the same as 150-210.

● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

Standard heads

**Series 151  
Micrometer Heads**

**Medium-sized Standard Type  
with 8mm diameter spindle**

Micrometer heads with a spindle diameter of 8mm, which can sustain the most heavy-duty use among universal types.

**SPECIFICATIONS**

- Measuring range: 0 - 25mm, 0 - 50mm
- Resolution: 0.01mm  
(0.001mm for models with vernier)
- Accuracy: ±2µm (25mm range)  
±4µm (50mm range)
- Measuring face: Material: Carbide tip  
Hardness: 90HRA or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric						
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features
151-224	0 - 25mm	±2µm	12mm	Plain	Flat (carbide tip)	W/ vernier (0.001mm)
151-223				W/ clamp nut		
151-214**				Plain*		
151-213**				W/ clamp nut*		
151-222				Plain		
151-221				W/ clamp nut		
151-212**				Plain*		
151-211**				W/ clamp nut*		
151-227				Plain		
151-228				W/ clamp nut		
151-225				Plain*		
151-226				W/ clamp nut*		
151-256	0 - 50mm	±4µm	12mm	Plain	Flat (carbide tip)	—
151-255				W/ clamp nut		
151-260				Plain		
151-259				W/ clamp nut		

Inch											
Order No.	Range	Accuracy	Stem dia.	Stem	Spindle end	Special features					
151-240	0 - .1"	±.0001"	.5"	Plain	Flat (carbide tip)	—					
151-239				W/ clamp nut							
151-238				Plain							
151-237				W/ clamp nut							
151-241**				Plain*							
151-242**				W/ clamp nut*							
151-243**				Plain*							
151-244**				W/ clamp nut*							
151-272				0 - .2"			±.0002"	.5"	Plain	Flat (carbide tip)	w/o ratchet stop
151-271									W/ clamp nut		
151-271									W/ clamp nut		

\* with spindle lock \*\* made-to-order models


\* with spindle lock \*\* made-to-order models

**DIMENSIONS**

**Plain stem**



Plain stem

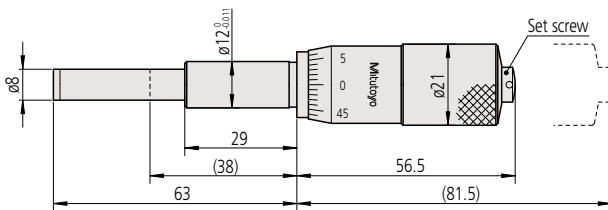


151-227 Mass: 150g

**Plain stem and spindle lock**

Unit: mm



Plain stem

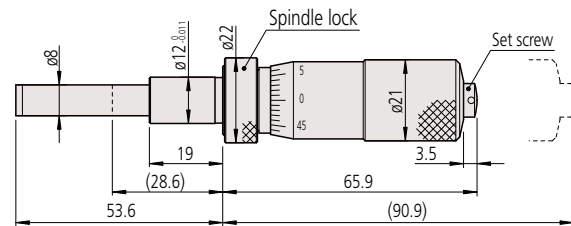


151-225 Mass: 165g

**Stem locknut**



Stem locknut

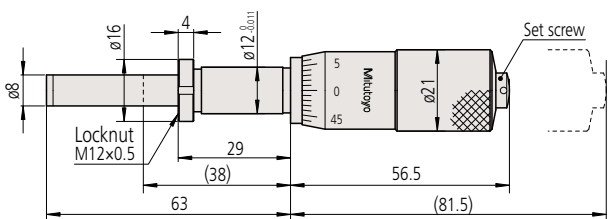


Fixture thickness: 25.5mm  
151-228 Mass: 155g

**Stem locknut and spindle lock**



Stem locknut

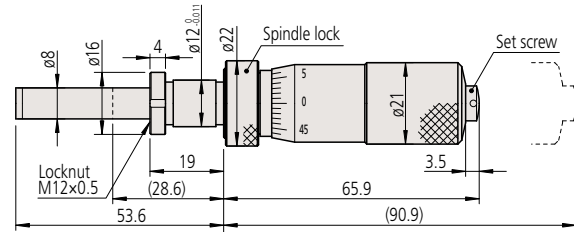


Fixture thickness: 15.5mm  
151-226 Mass: 165g

( ) : With spindle fully retracted.

## DIMENSIONS


### Plain stem

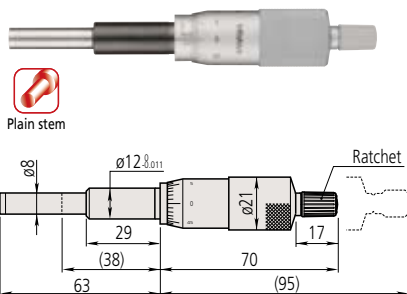

**151-224** Mass: 150g


Equipped with vernier  
**151-222**

Unit: mm

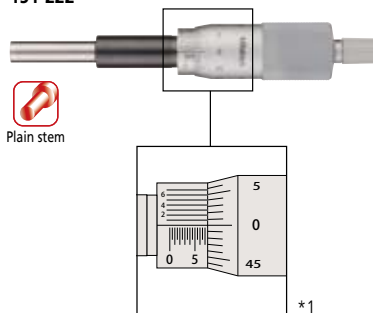


\*1 Other dimensions are the same as **151-224**.

### Stem locknut

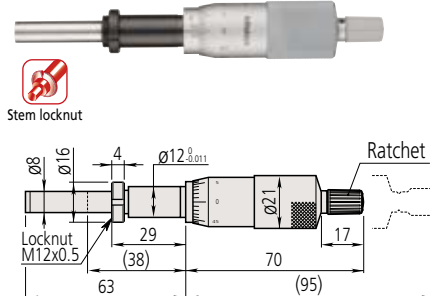


Fixture thickness: 25.5mm  
**151-223** Mass: 155g

Equipped with vernier  
**151-221**

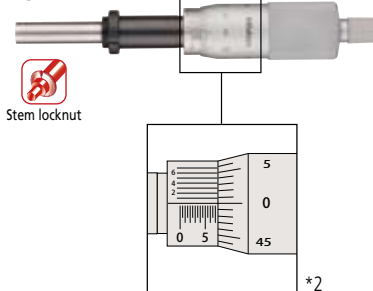


\*2 Other dimensions are the same as **151-223**.

### Plain stem and spindle lock

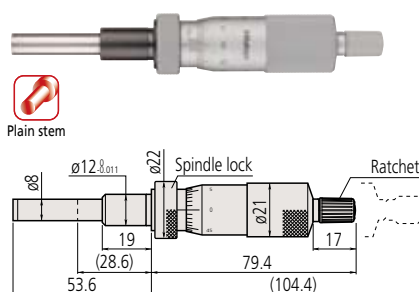


**151-214** Mass: 160g

Equipped with vernier  
**151-212**

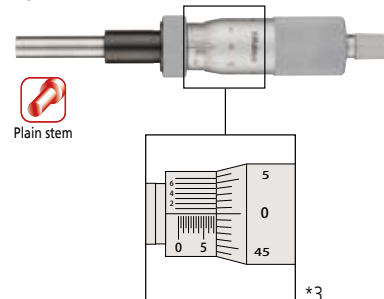


\*3 Other dimensions are the same as **151-214**.

### Stem locknut and spindle lock

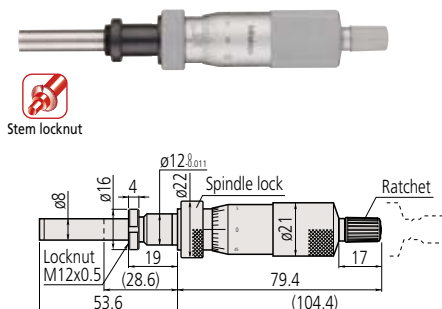

Fixture thickness: 15.5mm  
**151-213** Mass: 165g

Equipped with vernier  
**151-211**

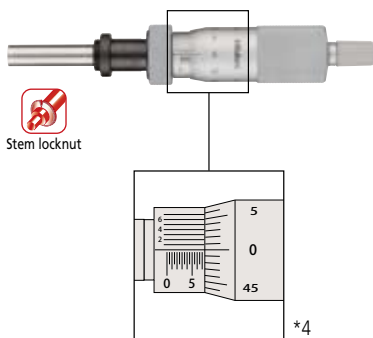


\*4 Other dimensions are the same as **151-213**.  
( ): With spindle fully retracted.

**DIMENSIONS**

Unit: mm

**Plain stem**

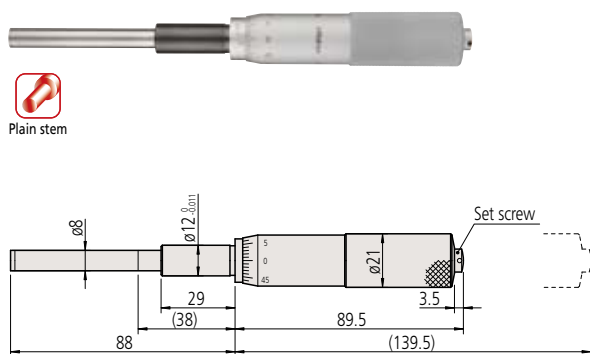


**151-260** Mass: 240g



Plain stem


Equipped with ratchet  
**151-256**



\*1

\*1 Other dimensions are the same as **151-260**.

**Stem locknut**

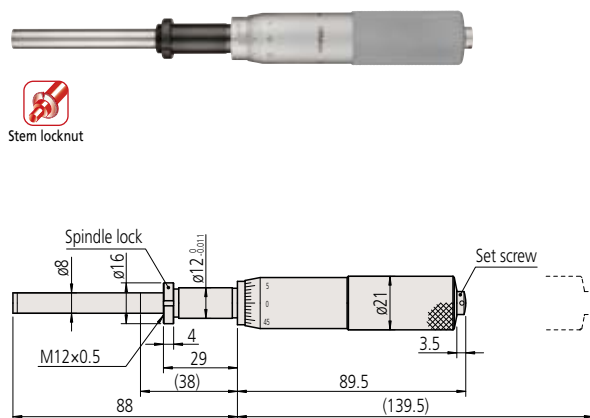


Fixture thickness: 25.5mm  
**151-259** Mass: 250g



Stem locknut

Equipped with ratchet  
**151-255**



\*2

\*2 Other dimensions are the same as **151-259**.  
( ): With spindle fully retracted.

● **CAD download service at Mitutoyo web site**

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 110 Differential Screw Thread Translator (Extra-Fine Feed) Type Micrometer Heads

Provides 10-20X finer feed than standard heads.

Differential screw mechanisms enable ultra-fine feed and resolution for ultra-precise positioning and adjustment applications. The dual-thimble arrangement on 110-502/4 models provides coarse and fine adjustment on the same head.

### SPECIFICATIONS

- Measuring face: Material: Carbide tip (110-502/504 are hardened tool steel)  
Hardness: 90HRC or more (Only 110-502/504 are 60HRC or more)  
Lapped
- Scale finishing: Satin-chrome plated
- Fixture thickness: 9.5mm (recommended)  
(Only 110-502/504 are 11.5mm)

Metric							
Order No.	Range	Graduation	Accuracy**	Stem dia.	Stem	Spindle end	Graduation features
110-101	0 - 2.5mm	0.001mm	±5µm/±1.5µm	12mm	w/ clamp nut	Flat (carbide tip)	Standard
110-102		0.0001mm					Fine
110-105	0 - 1mm	0.001mm	±3µm/±1.5µm	12mm	w/ clamp nut	Spherical (SR10) (carbide tip)	Standard
110-106		0.0001mm					Fine
110-107		0.001mm					Standard
110-108		0.0001mm					Fine
110-502	Thimble (fine) 0 - 0.2mm	Thimble (fine) 0.0005mm	±3µm/±1.5µm	9.5mm		Spherical (SR3)	Dual scales; 0.2mm fine-feed range
	Thimble (coarse) 0 - 13mm	Thimble (coarse) 0.01mm					


  

Inch							
Order No.	Range	Graduation	Accuracy**	Stem dia.	Stem	Spindle end	Graduation features
110-111	0 - .05"	.00002"	±.00025"/±.00006"	.5"	w/ clamp nut	Flat (carbide tip)	Standard
110-112		.000005"					Fine
110-115*	0 - .02"	.00002"	±.00015"/±.00006"	.5"	w/ clamp nut	Spherical (SR10) (carbide tip)	Standard
110-116*		.000005"					Fine
110-117*		.00002"					Standard
110-118*		.000005"					Fine
110-504	Thimble (fine) 0 - .006"	Thimble (fine) .00002"	±.00015"/±.00006"	.375"		Spherical (SR3)	Dual scales; 0.2mm/.006" fine-feed range
	Thimble (coarse) 0 - .5"	Thimble (coarse) .001"					


\* made-to-order models \*\* Wide range / narrow range

### DIMENSIONS



- Differential movement mechanism with double spindle.
- Non-rotating spindle.
- Fixture thickness: 9.5mm

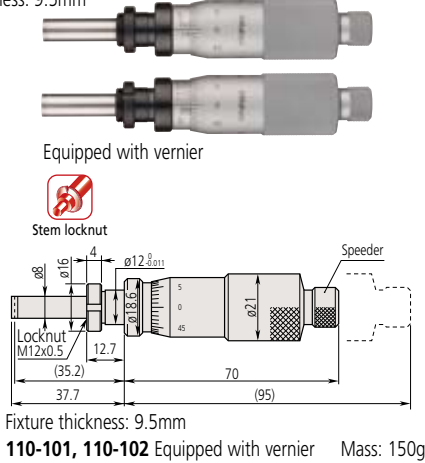

- Differential movement mechanism with double spindle.
- Non-rotating spindle.
- Fixture thickness: 9.5mm

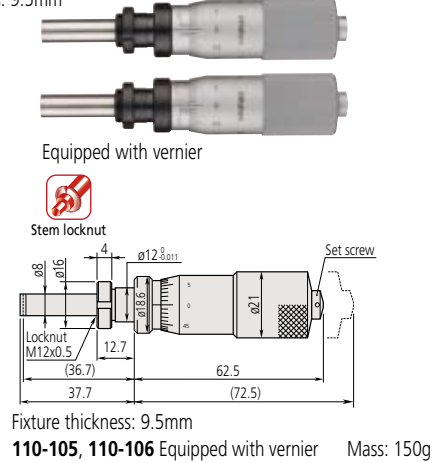

Unit: mm

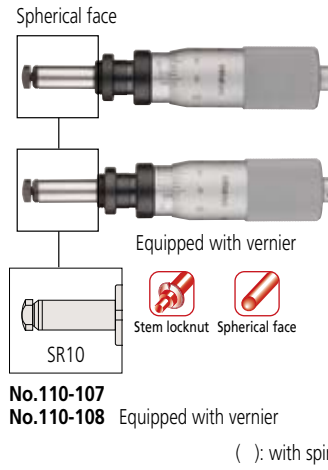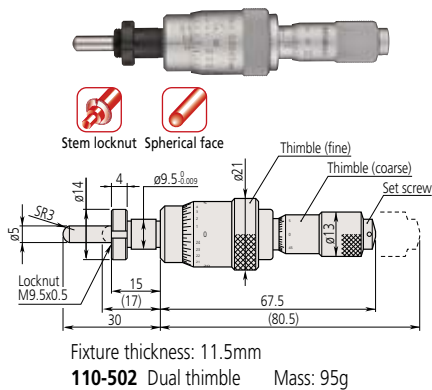

### ● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.



**Series 148  
Micrometer Heads**

**Fine Spindle Feed  
of 0.1mm/rev**

Provides 5X finer feed than standard heads.

The spindle thread of 0.1mm (0.5mm for standard types) per revolution enables very precise feeding and positioning. This type can also replace standard heads in many applications where space-saving is important (see diagram below). Stem diameter and range compatibility enables heads 148-142/43 and 148-342/43 to be drop-in replacements for the 0-6.5mm range Short Body heads (148-301/02/03/04/05/06/13/14 and inch equivalents) shown on page 18; similarly 148-242/43 for the 0-6.5mm range Small/Ultra-small heads (148-201/03/05/07/09/11) shown on pages 16/17; and 148-244/45 for the 0-5mm range Small/Ultra-small heads (148-215/6) shown on pages 16/17.

**SPECIFICATIONS**


- Measuring face: Material: Alloy tool steel  
Hardness: 60HRC or more  
Lapped
- Fixture thickness: 6mm (148-142/143/342/343)  
4mm (148-242/243/244/245)
- Scale finishing: Satin-chrome plated

Metric									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Special features	
148-142	0 - 6.5mm	0.002mm	±2µm	9.5mm	Plain	Spherical (SR4)	0.1mm	—	
148-143					w/ clamp nut				
148-342					Plain				
148-343					w/ clamp nut				
148-242					Plain				
148-243	w/ clamp nut	Spherical (SR3)	0.1mm	Thicker & shorter thimble					
148-244	Plain								
148-245	w/ clamp nut								
	0 - 5mm	0.004mm	±5µm	6mm				Small thimble diameter	
				3.5mm					

**DIMENSIONS**


**Plain stem**

Unit: mm

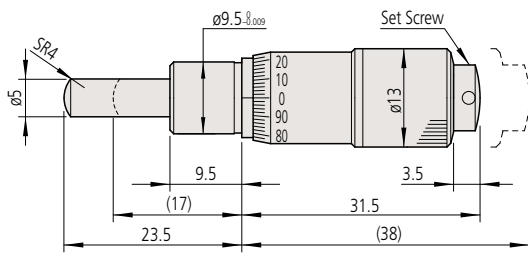

148-142 Mass: 31g


**Stem locknut**

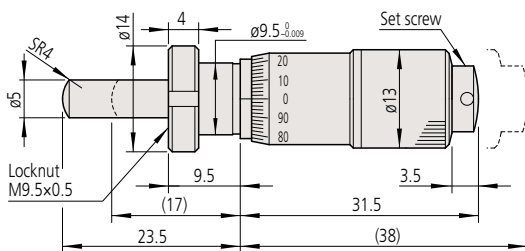

Fixture thickness: 6mm  
148-143 Spherical face Mass: 34g

( ): with spindle fully retracted


**Spindle pitch**




Pitch = 0.1mm Pitch = 0.5mm

**Applications**


- Semiconductor-wafer positioning machinery and optical component alignment units, etc.
- Precision X-Y table positioning



- Precision adjustment of mirror in holder



**Comparison of mounting dimensions between a fine-pitch head and a standard-pitch head at the mid-range travel position.**

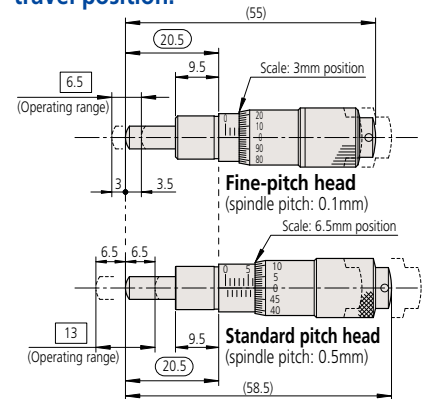

While the fine-pitch micrometer head has a measuring range of 6.5mm, the standard head has a larger range of 13mm.

When replacing a standard head, the fine-pitch type can use the common range in the middle of the spindle travel. The standard and compact types of fine-pitch head are otherwise completely interchangeable.


## DIMENSIONS

Unit: mm

### Plain stem



Plain stem Spherical face

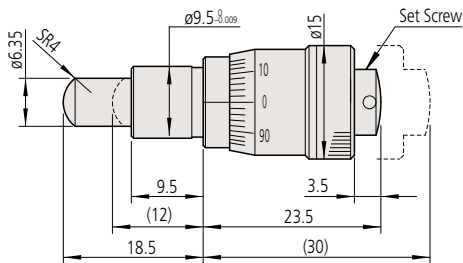


**148-342** Mass: 29g


### Stem locknut



Stem locknut Spherical face

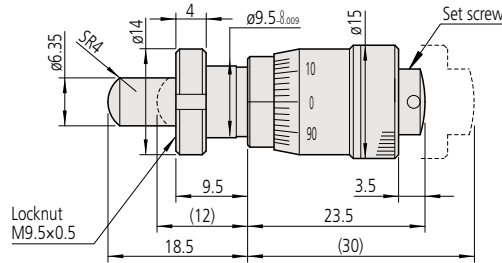

Fixture thickness: 6mm  
**148-343** Spherical face Mass: 31g




Sleeve marker

### Plain stem



Plain stem Spherical face

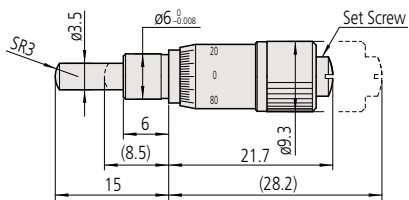


**148-242** Mass: 10g


### Stem locknut



Stem locknut Spherical face

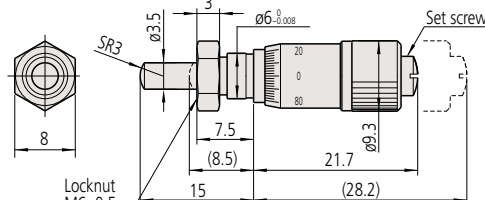

Fixture thickness: 4mm  
**148-243** Spherical face Mass: 10g




Sleeve marker

### Plain stem



Plain stem Spherical face

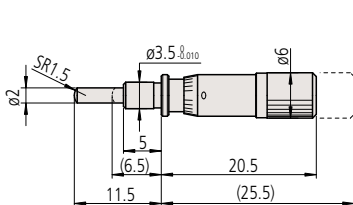


**148-244** Mass: 4g

### Stem locknut



Stem locknut Spherical face

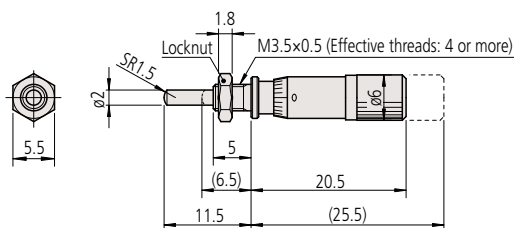

Fixture thickness: 3mm  
**148-245** Spherical face Mass: 5g



Sleeve marker

**Series 148  
Micrometer Heads**

**Fine Spindle Feed  
of 0.25mm/rev**

Provides 2X finer feed than standard head types.

The 0.25mm pitch thread on the spindle provides a 2X finer feed than standard for precise positioning applications. Miniature design is also useful in reducing size of fixtures. Stem diameter and range compatibility enables heads **148-132/33** to be drop-in replacements for all the 0-13mm range Small Standard heads shown on pages 20/21, and Short Body heads (**148-307/08/09/10/11/12** and inch equivalents) shown on pages 18/19; similarly **148-322/23** for the 0-6.5mm range Short Body heads (**148-301/02/03/04/05/06/13/14** and inch equivalents) shown on page 18.

**SPECIFICATIONS**



- Measuring face: Material: Alloy tool steel  
Hardness: 60HRC or more  
Lapped
- Scale finishing: Satin-chrome plated
- Fixture thickness: 6mm

Metric		Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch
		<b>148-132</b>	0 - 13mm	0.01mm	±2µm	9.5mm	Plain	Spherical (SR4)	0.25mm
		<b>148-133</b>					w/ clamp nut		
		<b>148-322</b>	0 - 6.5mm				Plain		
		<b>148-323</b>					w/ clamp nut		



**DIMENSIONS**

**Plain stem**

Unit: mm

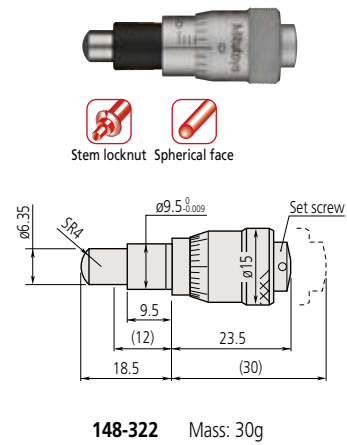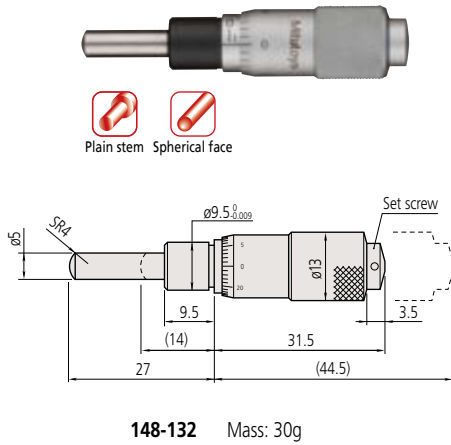

**Stem locknut**

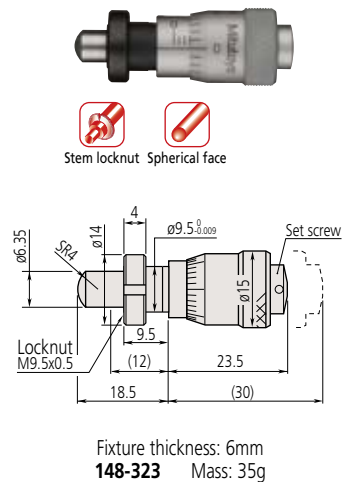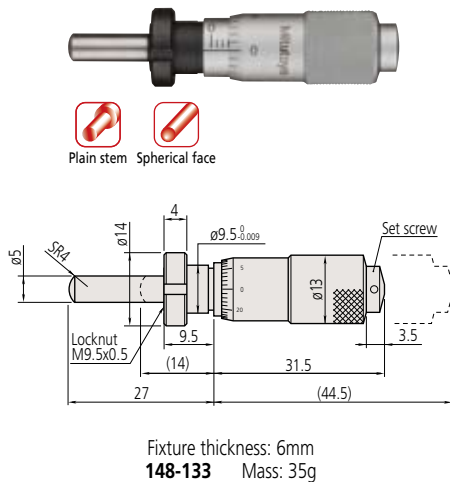

( ): with spindle fully retracted

● **CAD download service at Mitutoyo web site**


2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 148 Micrometer Heads Locking-screw Type

A conveniently positioned thumbscrew is provided for those applications where the spindle has to be frequently locked and unlocked.


### DIMENSIONS

#### Plain stem

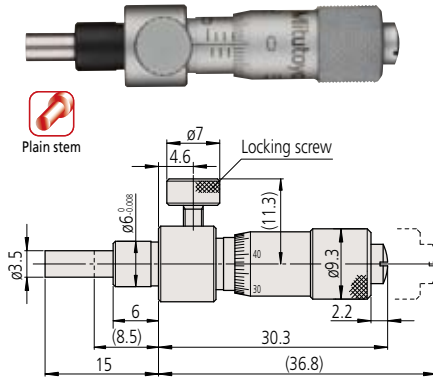

**148-220** Mass: 16g


#### Stem locknut

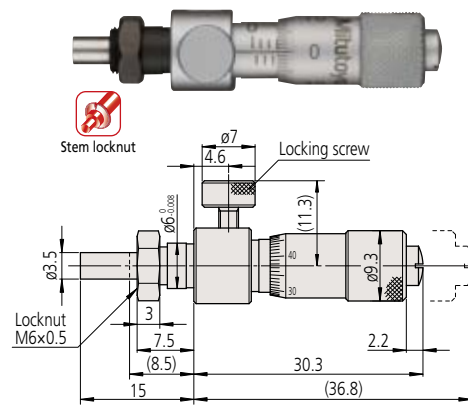

Fixture thickness: 4mm  
**148-221** Mass: 17g


Unit: mm

#### Plain stem

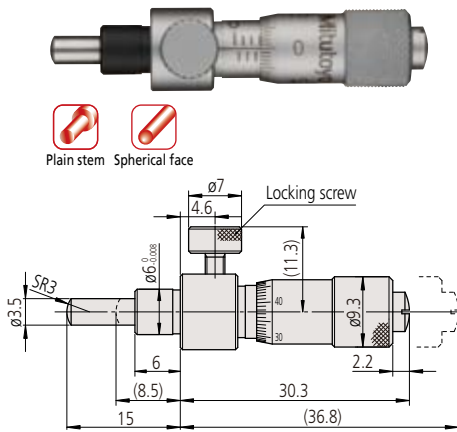

Spherical face (SR3)  
**148-222** Mass: 16g

#### Stem locknut

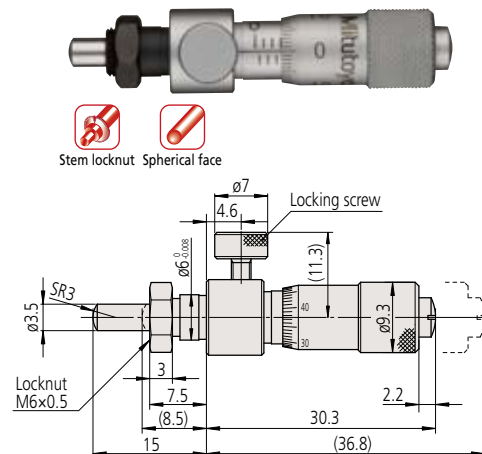

Spherical face (SR3) Fixture thickness: 4mm  
**148-223** Mass: 17g

( ) : with spindle fully retracted

Specialized heads

### SPECIFICATIONS



Secure spindle


Metric								Inch							
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Graduation features	Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Graduation features
<b>148-220</b>	0 - 6.5mm		±5μm	6mm	Plain	Flat	Standard	<b>148-230</b>	0 - .25"		±.00025"	.25"	Plain	Flat	Standard
<b>148-221</b>					W/ clamp nut	W/ clamp nut									
<b>148-222</b>					Plain	Spherical (SR3)		Plain					Spherical (SR3)		
<b>148-223</b>					W/ clamp nut	W/ clamp nut									
<b>148-150</b>	0 - 13mm	0.01mm	±2μm	9.5mm	Plain	Flat	Standard	<b>148-160</b>	0 - .5"	.001"	±.0001"	.375"	Plain	Flat	Standard
<b>148-151</b>					W/ clamp nut	W/ clamp nut									
<b>148-152</b>					Plain	Spherical (SR4)		Plain					Spherical (SR4)		
<b>148-153</b>					W/ clamp nut	W/ clamp nut									
<b>148-316</b>	0 - 6.5mm		±2μm	9.5mm	Plain	Flat	Standard	<b>148-326</b>	0 - .25"		±.0001"	.375"	Plain	Flat	Standard
<b>148-317</b>					W/ clamp nut	W/ clamp nut									
<b>148-318</b>					Plain	Spherical (SR4)		Plain					Spherical (SR4)		
<b>148-319</b>					W/ clamp nut	W/ clamp nut									

**DIMENSIONS**


**Plain stem**

**Stem locknut**

Unit: mm

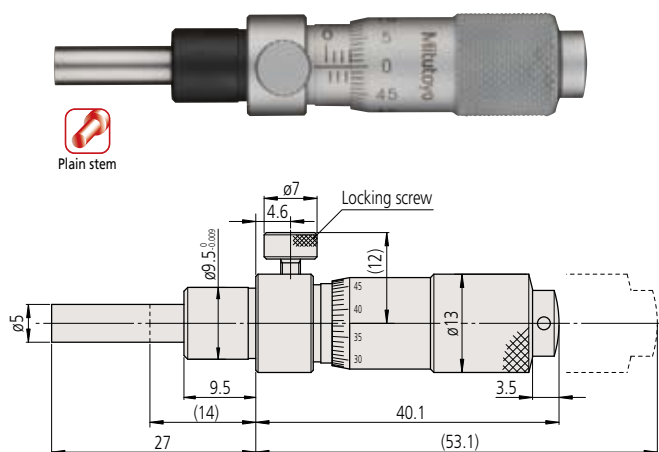


**148-150** Mass: 40g

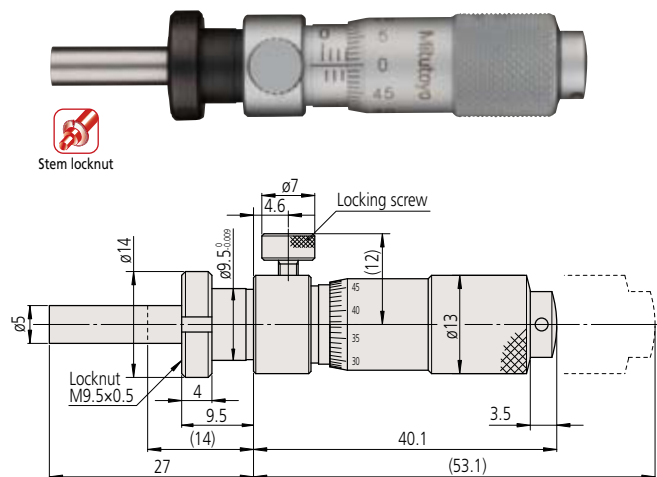


Fixture thickness: 6mm  
**148-151** Mass: 43g

**Plain stem**

**Stem locknut**

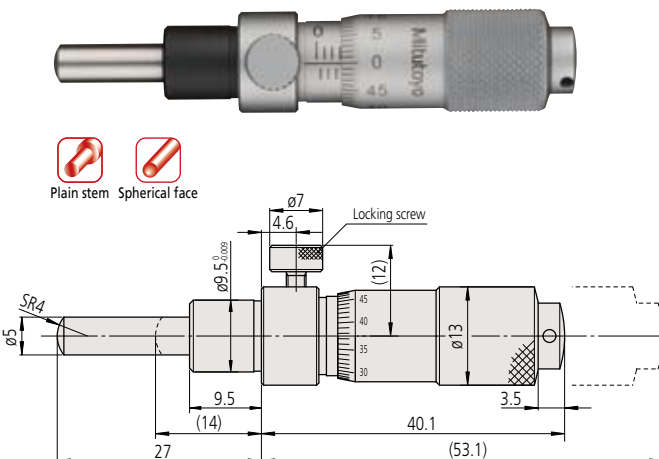

Spherical face (SR4)  
**148-152** Mass: 40g

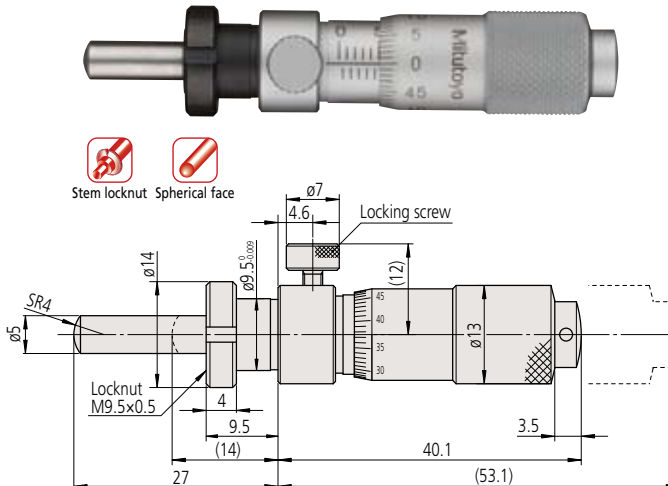

Spherical face (SR4) Fixture thickness: 6mm  
**148-153** Mass: 43g


( ): with spindle fully retracted

● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## DIMENSIONS


### Plain stem

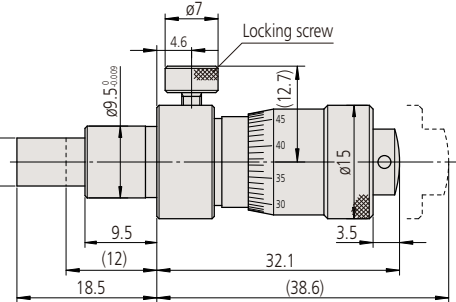

**148-316** Mass: 40g



### Stem locknut

Unit: mm

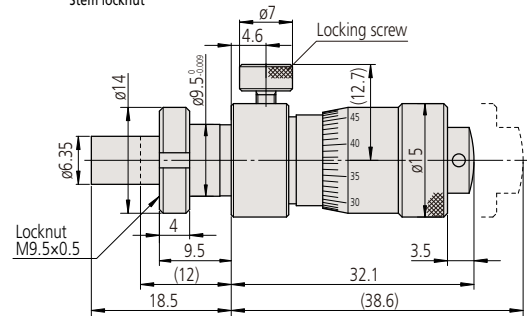



Fixture thickness: 6mm  
**148-317** Mass: 43g

### Plain stem

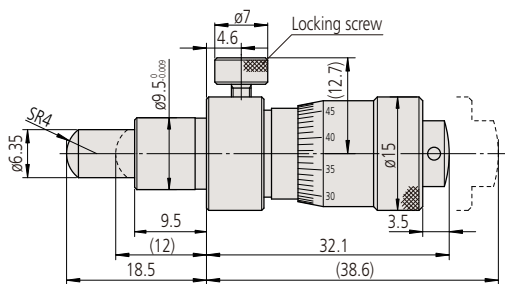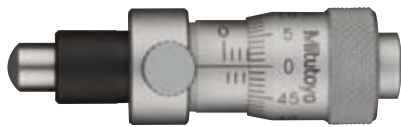

Spherical surface (SR4)  
**148-318** Mass: 40g

### Stem locknut

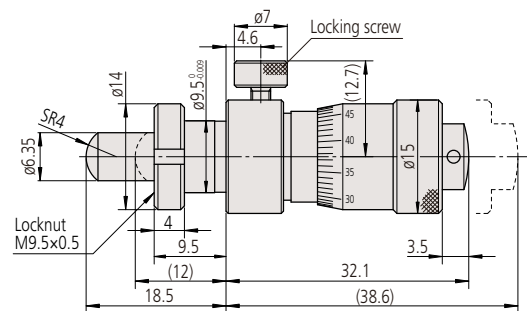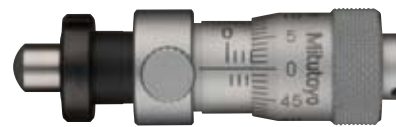

Spherical surface (SR4) Fixture thickness: 6mm  
**148-319** Mass: 43g

( ) : With spindle fully retracted.

### ● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

**Series 153  
Micrometer Heads**

**Non-rotating  
Spindle Type**

Micrometer heads featuring a non-rotating spindle for delicate workpieces.

The non-rotating spindle design suits applications where the twisting effect of the standard spindle is undesirable because of the risk of damage to delicate or polished workpiece surfaces.

**SPECIFICATIONS**

- Measuring face: Material: Carbide tip  
Hardness: 90HRA or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
153-101	0 - 15mm	0.01mm	±3μm	9.5mm	Plain	Flat (carbide tip)	0.5mm	Standard	
153-201*	0 - 25mm	0.001mm		w/ vernier (0.001mm)					
153-202*		0.01mm		Standard					
153-204		0.001mm		w/ vernier (0.001mm)					
Inch									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Special features	
153-108**	0 - .5"	.001"	±.00015"	.375"	Plain	Flat (carbide tip)	.025"	w/ vernier (.0001")	
153-205*	0 - 1"	.0001"		Standard					
153-206*		.001"		w/ vernier (.0001")					
153-207		.001"		Standard					
153-208	.0001"	w/ vernier (.0001")							

\* with ratchet stop    \*\* made-to-order model

**DIMENSIONS**

Unit: mm

**153-101** Mass: 70g

**153-201** Mass: 125g

**153-203** Mass: 125g

Equipped with ratchet and vernier ratchet  
**No.153-202**

Without ratchet/ Equipped with vernier ratchet  
**No.153-204**

\*1 Other dimensions are the same as **151-201**.

\*2 Other dimensions are the same as **153-203**.  
( ): With spindle fully retracted.

● CAD download service at Mitutoyo web site  
2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 152 Micrometer Heads

### Quick Spindle Feed of 1mm/rev

2X faster feedrate than standard provides quicker positioning.


The 1mm-pitch thread on the spindle provides a 2X faster feed than standard for applications needing quick positioning, and the simple scale avoids the possibility of making a 0.5mm reading error. The larger screw thread also provides greater load-bearing capacity than does a standard head, which is useful when the head is used as a stop.

### SPECIFICATIONS

- Measuring face: Material: Carbide tip  
Hardness: 90HRC or more  
Lapped
- Scale finishing: Satin-chrome plated

Metric							
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch
152-101	0 - 15mm	0.01mm	±2μm	12mm	Plain	Flat (carbide tip)	1mm
152-102	0 - 25mm		±4μm				
152-103	0 - 50mm						

### DIMENSIONS

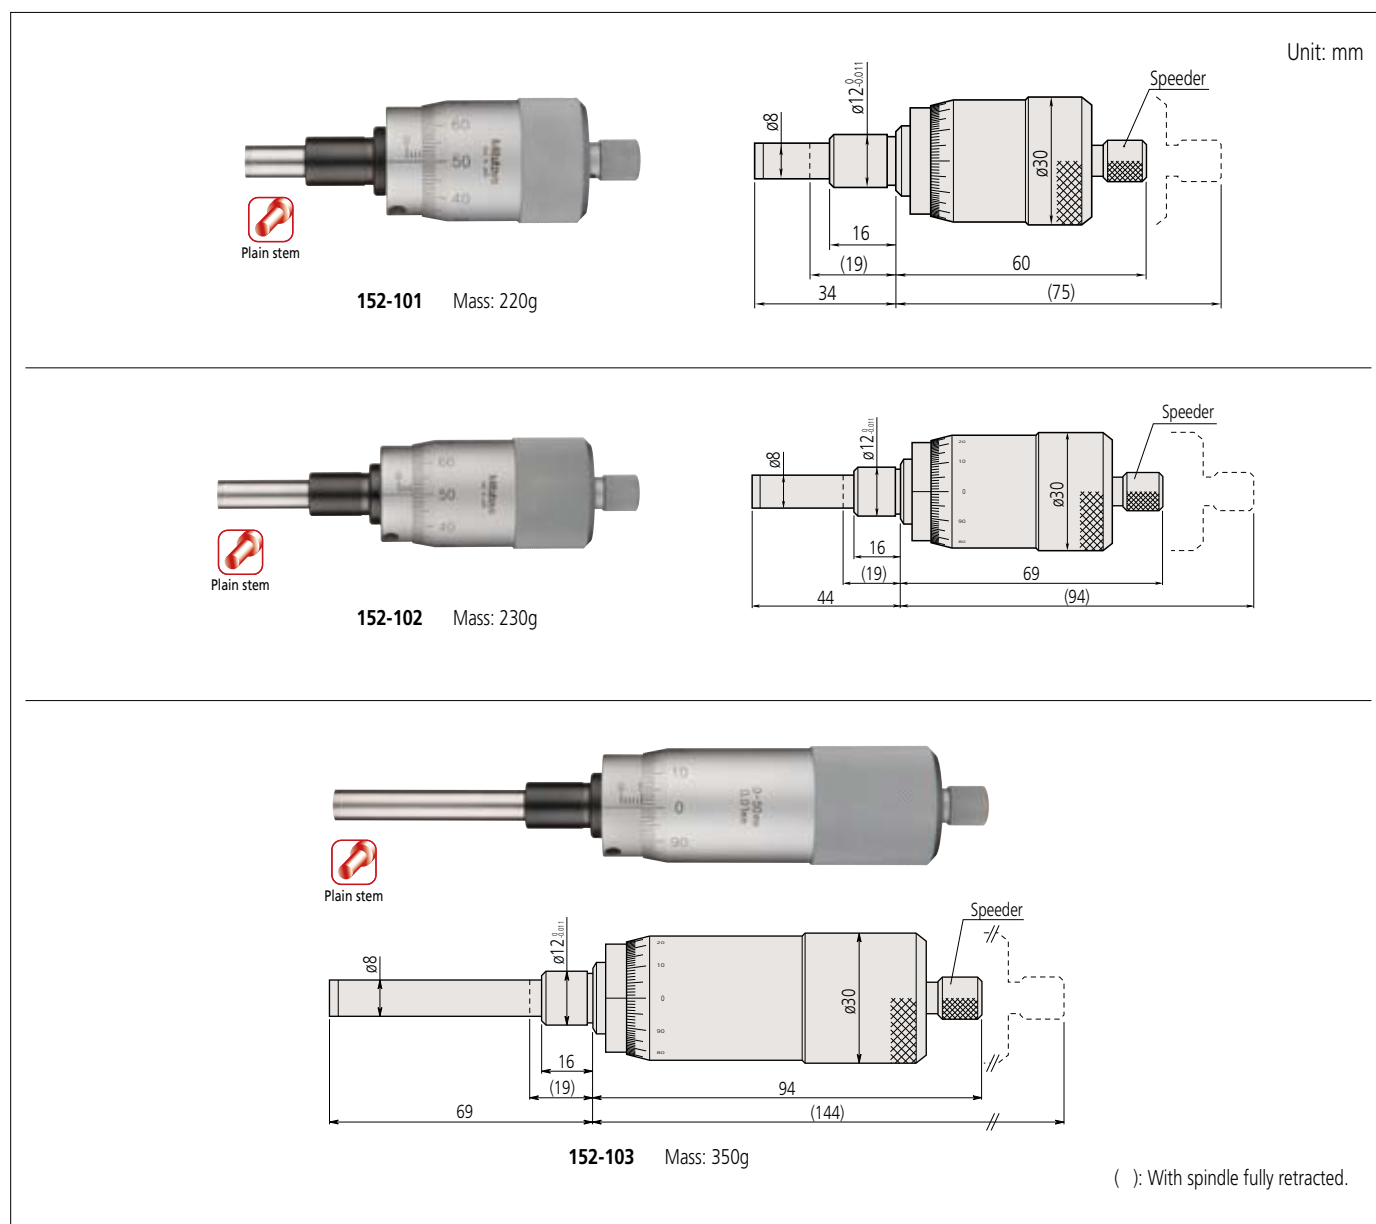

### ● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.



**Series 152  
Micrometer Heads Large thimble type**

Large thimble provides higher resolution and readability.

The use of a large-diameter thimble provides 5 times the resolution of standard types. Thanks to improvement in operability, even a small force rotates the thimble. The spindle feeds at the standard rate of 0.5mm/rev and the graduation schemes include a bidirectional option.


**SPECIFICATIONS**

- Measuring face: Material: Carbide tip  
Hardness: 90HRC or more  
Lapped
- Scale finishing: White anodized aluminium
- Fixture thickness: 22.5mm(recommended)

Metric									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
152-283	0 - 10mm	0.002mm	±2µm	12mm	w/ clamp nut	Flat (carbide tip)	0.5mm	Standard	
152-332	0 - 25mm							Bidirectional	
152-348	0 - 50mm		±4µm		Bidirectional				
Inch									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
152-372	0 - 1"	.0001"	±.0001"	.5"	w/ clamp nut	Flat (carbide tip)	.025"	Bidirectional	
152-388	0 - 2"							Bidirectional	

**DIMENSIONS**

Unit: mm

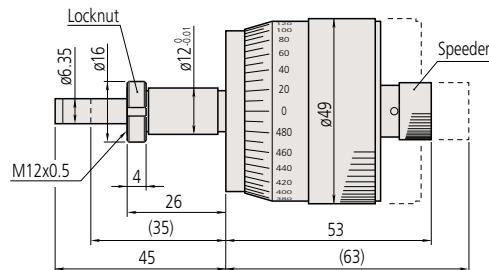

Fixture thickness: 22.5mm  
152-283 Mass: 190g

( ): With spindle fully retracted.

● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## DIMENSIONS

Unit: mm




Plain stem



Plain stem


Bidirectional

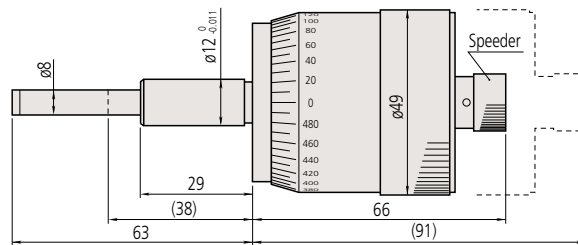

**152-332**  
**152-348** Bidirectional Mass: 310g



Plain stem

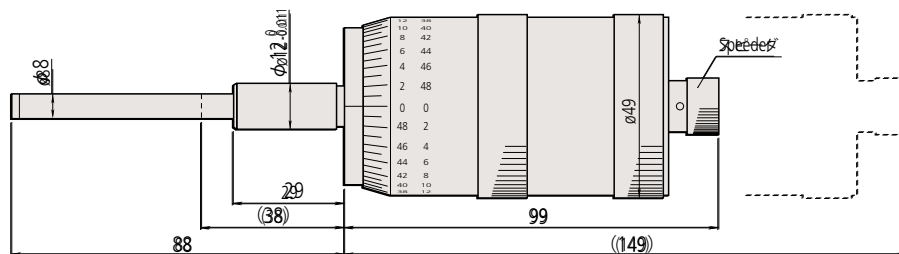

**152-380** Mass: 460g

( ): with spindle fully retracted

Specialized heads

**Series 152**  
**Micrometer Heads XY-Stage type**

Micrometer heads developed specifically for XY stages.

A spindle pitch of 1mm allows quick feeding and positioning. The large thimble provides excellent readability and operability, with the bidirectional graduations being specifically arranged for reading from the same direction in XY-stage operation.

**SPECIFICATIONS**

- Measuring face: Material: Carbide tip  
(152-389/390/391/392 are alloy tool steel)  
Hardness: 90HRA or more  
(152-389/390/391/392 are 60HRC or more)  
Lapped
- Scale finishing: White anodized aluminium

Metric								
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle pitch	Graduation features	
152-390	0 - 25mm	0.005mm	±2µm	18mm	Plain	1mm	for X-axis, bidirectional	
152-389		0.001mm					for X-axis, with Vernier	
152-402		Vernier graduation						
152-401								
Inch								
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle pitch	Graduation features	
152-392	0 - 1"	.0001"	±.0001"	.709"	Plain	.025"	for X-axis, bidirectional	
152-391								

**DIMENSIONS**

**152-390** Mass: 270g

- The thimble can be rotated to a better reading position while maintaining the spindle position.

Unit: mm

**No.152-389**

\*1 Other dimensions are the same as **152-390**.

Length of A: 0 to 6 A = 6 in the drawing above.  
**152-402** Mass: 460g

- The zero-setting ring allows spindle movement without thimble position change for easy zero setting.

**No.152-401**

\*2 Other dimensions are the same as **152-402**.  
( ): With spindle fully retracted.

- **CAD download service at Mitutoyo web site**  
2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Series 197 Micrometer Heads Long Stroke Non-rotating Spindle

Long stroke head with non-rotating spindle and large diameter thimble.

A large-diameter head offering twice the stroke and feedrate of standard heads for excellent operability combined with a non-rotating spindle to suit those applications where the twisting effect of the standard spindle is undesirable.


### SPECIFICATIONS

- Measuring face: Material: Carbide tip  
Hardness: 90HRA or more  
Lapped
- Scale finishing: White anodized aluminium

Metric									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
197-101	0 - 50mm	0.005mm	±5µm	18mm	Plain	Flat (carbide tip)	1mm	Bidirectional	
Inch									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
197-201	0 - 2"	.0002"	±.0001"	.709"	Plain	Flat (carbide tip)	.05"	Bidirectional	

### DIMENSIONS

Unit: mm

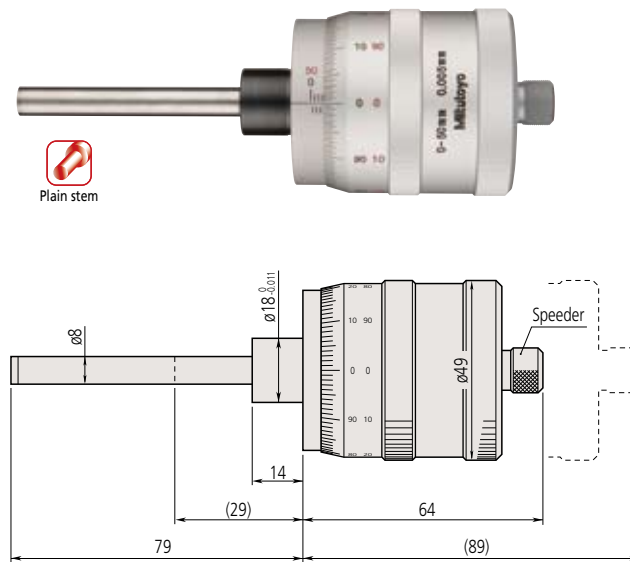

197-101 Mass: 300g

( ): With spindle fully retracted.

#### ● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

**Series 153  
Micrometer Heads**

**High Accuracy and Resolution**

High-accuracy and high-resolution micrometer heads.

A large thimble, non-rotating spindle head that provides higher accuracy and resolution than standard types for high-accuracy applications. The spindle feeds at the standard rate of 0.5mm/rev and the graduation scheme is bidirectional.

**SPECIFICATIONS**

- Measuring face: Material: Carbide tip  
Hardness: 90HRA or more  
Lapped
- Scale finishing: White anodized aluminium

Metric									
Order No.	Range	Graduation	Accuracy*	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
153-301	0 - 25mm	0.0005mm	±1/±0.5µm	18mm	Plain	Flat (carbide tip)	0.5mm	Bidirectional	
Inch									
Order No.	Range	Graduation	Accuracy*	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
153-302	0 - 1"	.00001"	±.00005"/±.00003"	.75"	Plain	Flat (carbide tip)	.025"	Bidirectional	

\* Wide range / narrow range

**DIMENSIONS**

Unit: mm

153-301 Mass: 765g  
153-302 Mass: 775g

[ ] : Order No. 153-302  
( ) : With spindle fully retracted.

**Series 250  
Micrometer Heads**

**Digit Counter Type**

A mechanical-digit display head.

A mechanical counter type of head that offers easy digital reading with no battery needed. Counter resolution is 0.01mm and there is a graduated sleeve for finer work. The spindle feeds at the standard rate of 0.5mm/rev.

**SPECIFICATIONS**

- Measuring face: Material: Carbide tip  
Hardness: 90HRC or more  
Lapped
- Scale finishing: White anodized aluminium

Metric									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
250-301	0 - 25mm	0.01mm	±2µm	10mm	Plain	Flat (carbide tip)	0.5mm	—	
Inch									
Order No.	Range	Graduation	Accuracy	Stem dia.	Stem	Spindle end	Spindle pitch	Graduation features	
250-312	0 - 1"	.0001"	±.0001"	.375"	Plain	Flat (carbide tip)	.025"	Vernier scale	

**DIMENSIONS**

Unit: mm

250-301 Mass: 165g


( ) : With spindle fully retracted.

● CAD download service at Mitutoyo web site

2D CAD data can be downloaded at our web site. For details, refer to page 10.

## Precision Leadscrews

- Mitutoyo manufactures simple and less expensive precision leadscrews for precise positioning mechanisms and fine-feed mechanisms, in addition to standard micrometer heads.
- Mitutoyo also manufactures leadscrews with special specifications, such as 0.25mm pitch, as well as those with the standard 0.5mm feed pitch and with dimensions and forms that meet customer's requirements.
- Durability: 100-thousand operations are guaranteed (use condition: 4 kg load; 2 kg for **AS-6.5** and **BS-6.5**)
- Main applications:
  - Precision feed stages
  - Fine adjustment of optical elements (mirrors, prisms)
  - Fiber optic centering devices
  - Various assembly and adjustment jigs

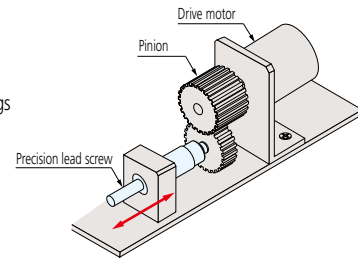


### SPECIFICATIONS

Order No.	Model	Stroke (mm)	Feed pitch (mm)	Feed accuracy (μm)	Stem diameter (mm)	Tip diameter (mm)	Tail diameter (mm)	Screw nominal diameter	Sleeve diameter (mm)	Measuring face	Mass	Others
04AZA160	AS-6.5	6.5	0.5	±5	ø6 <sup>-0.008</sup>	ø3.5	ø3 <sup>-0.01</sup>	M4.5 x 0.5	ø7	Hardened	10g	<ul style="list-style-type: none"> <li>• AS type: Flat spindle tip without nut</li> <li>• BS type: Spherical spindle tip with nut</li> </ul>
04AZA161	BS-6.5				ø9.5 <sup>-0.009</sup>	ø5	ø5 <sup>-0.012</sup>	M7.35 x 0.5	ø10.5		11g	
04AZA162	AS-13	ø9.5 <sup>-0.009</sup>		ø5	ø5 <sup>-0.012</sup>	27g						
04AZA163	BS-13	13		±2	ø9.5 <sup>-0.009</sup>	ø5	ø5 <sup>-0.012</sup>	M7.35 x 0.5	ø10.5	Carbide	30g	
04AZA164	AS-25										25	
04AZA165	BS-25	64g										


### DIMENSIONS

#### Type AS: Plain stem

Unit: mm

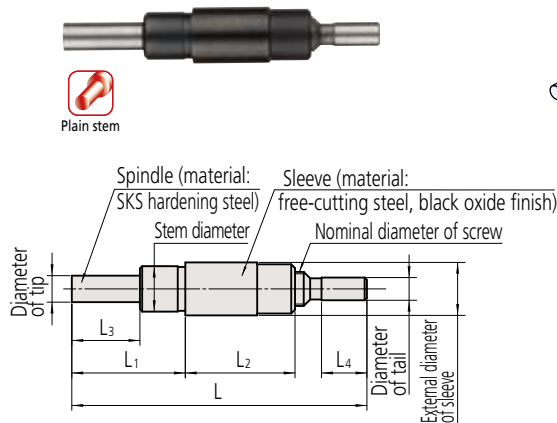

#### Type BS: Stem with locknut

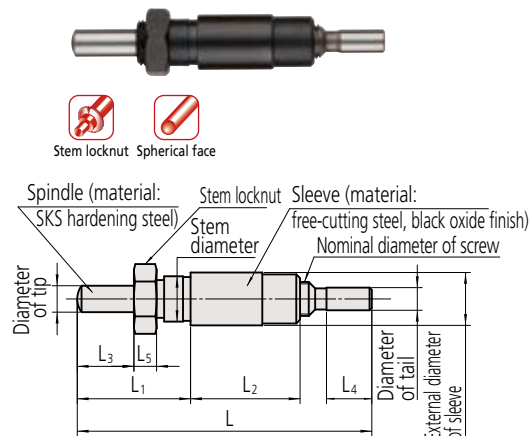

Order No.	L	L1	L2	L3	L4	L5
04AZA160	39	15	14.5	9	6	—
04AZA161	—	—	—	7.5	3	—
04AZA162	57.5	25	21.5	15.5	8	—
04AZA163	—	—	—	—	—	4
04AZA164	96.5	42	39.5	27	10	—
04AZA165	—	—	—	—	—	4

## Micrometer Heads Mounting Fixtures

● Manufacturing brackets to mount micrometer heads for each particular application can be laborious and costly. Mitutoyo offers various types of fixtures for micrometer heads to meet a wide range of applications. These fixtures are made of nickel-plated cast iron.




### SPECIFICATIONS

Mounting hole size

Micrometer Head	Fixtures (Order No.)	Mounting hole size
<b>148 Series</b>	<b>303560, 303562, 303564, 303566 303559, 303561, 303563, 303565</b>	ø9.5×9.5 long for plain stem or stem locknut type micrometer heads
<b>149 Series</b>	<b>303569, 303571, 303573, 303575 303568, 303570, 303572, 303574</b>	ø9.5×15 long for plain stem or stem locknut type micrometer heads
<b>150 Series</b>	<b>303579, 303581, 303583, 303585 303578, 303580, 303582, 303584</b>	ø10×15 long for plain stem or stem locknut type micrometer heads

\* Supplied with a socket head screw (M3 x 0.5 x 12) for fixtures to be used with a micrometer head without stem locknut (plain stem type micrometer head).

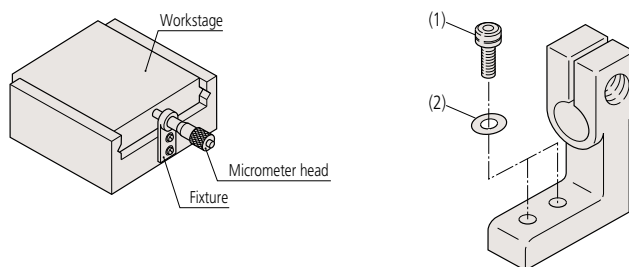

### SPECIFICATIONS


Recommended socket head screws for the fixtures

Fixtures (Order No.)	Socket head screw (1)	Washer (2)
<b>303559, 303560, 303561, 303562, 303563, 303564, 303565, 303566</b>	M3×0.5×8 M3×0.5×12	Small, Nominal dia.: 3 Small, Nominal dia.: 3
<b>303568, 303569, 303570, 303571, 303572, 303573 303578, 303579, 303580, 303581, 303582, 303583</b>	M4×0.7×10	Small, Nominal dia.: 4
<b>303574, 303575 303584, 303585</b>	M4×0.7×12	Small, Nominal dia.: 4

( ): with spindle fully retracted


## DIMENSIONS

### Fixtures for micrometer heads with stem locknut




(Unit: mm)

Order No.	A	B	C	D	E	F	G	H	I	J	K
303559	ø9.5	6	15	20	24	5	11	8	0.5	27.5	ø3.4
303568		11.5	20	30	35	7	16	12	1.75	40	ø4.5
303578	ø10										




(Unit: mm)

Order No.	A	B	C	D	E	F	G	H	I
303563	ø9.5	6	30	37.5	4.5	15	10	15	ø3.4
303572		11.5	40	50	6.5	18	15	20	ø4.5
303582	ø10								



(Unit: mm)


Order No.	A	B	C	D	E	F	G
303561	ø9.5	6	40	3.5	30	15	ø3.4
303570		11.5	60	5.5	40	20	ø4.5
303580	ø10						



(Unit: mm)


Order No.	A	B	C	D	E	F	G	H	I	J	K	L
303565	ø9.5	6	ø15	15	25	8.5	7.5	10	10	27.5	ø3.4	0.75
303574		11.5		20	40		10	20	15	35	ø4.5	1.25
303584	ø10											

### Fixtures for plain stem type micrometer heads




(Unit: mm)

Order No.	A	B	C	D	E	F	G	H	I	J	K	L	G
303560	ø9.5	9	15	20	23	5	11	8	1.5	3.25	4.5	ø3.4	M3×0.5
303569		14.5	20	30	35	7	16	12	3.25	4.25	7.25	ø4.5	
303579	ø10												




(Unit: mm)

Order No.	A	B	C	D	E	F	G	H	I	J	K
303564	ø9.5	9	30	4.25	4	15	10	15	4.5	ø3.4	M3×0.5
303573		14.5		5.25	6	18	15	20	7.25	ø4.5	
303583	ø10										



(Unit: mm)

Order No.	A	B	C	D	E	F	G	H	I	J
303562	ø9.5	9	15	20	40	3	30	15	ø3.4	M3×0.5
303571		14.5		22.5	60	5	40	20	ø4.5	
303581	ø10									






(Unit: mm)

Order No.	A	B	C	D	E	F	G	H	I	J	K	L	M
303566	ø9.5	9	15	15	25	8.5	7.5	10	10	32.5	4.5	ø3.4	M3×0.5
303575		14.5		20	40		10	20	15	40	7.25	ø4.5	
303585	ø10												



## Guidelines for Self-made Fixtures

A micrometer head should be mounted by the stem in an accurately machined hole using a clamping method that does not exert excessive force on the stem. There are three common mounting methods as shown below. Method 3 is not recommended. Adopt methods (1) or (2) wherever possible. (Unit: mm)

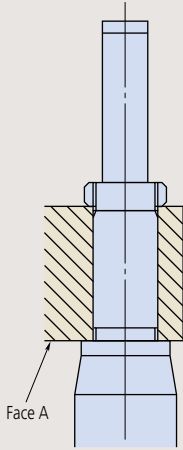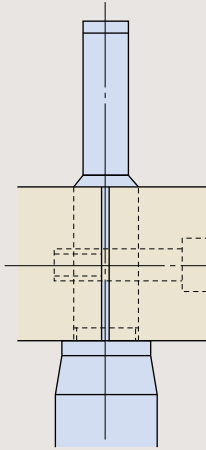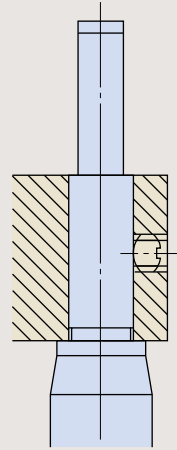Mounting method	(1) Clamp nut				(2) Split-body clamp				(3) Setscrew clamp			
	Points to keep in mind											
Stem diameter	ø9.5	ø10	ø12	ø18	ø9.5	ø10	ø12	ø18	ø9.5	ø10	ø12	ø18
Mounting hole Fitting tolerance	G7 +0.005 to +0.020		G7 +0.006 to +0.024		G7 +0.005 to +0.020		G7 +0.006 to +0.024		H5 0 to +0.006		H5 0 to +0.008	
Precautions	Care should be taken to make Face A square to the mounting hole. The stem can be clamped without any problem at squareness within 0.16/6.5.				Remove burrs generated on the wall of the mounting hole by the slitting operation.				M3x0.5 or M4x0.7 is an appropriate size for the setscrew. Use a brass plug under setscrew (if thickness of fixture allows) to avoid damaging stem.			

## Maximum Loading Capacity on Micrometer Heads

The maximum loading capacity of a micrometer head depends mainly on the method of mounting and whether the loading is static or dynamic (used as a stop, for example). Therefore the maximum loading capacity of each model cannot be definitively specified. Therefore the maximum loading capacity of each model cannot be definitively specified in the unit of N (kgf). The loading limits recommended by Mitutoyo (at less than 100,000 revolutions if used for measuring within the guaranteed accuracy range) and the results of static load tests using a small micrometer head are given below.


### 1. Recommended maximum loading limit

		Maximum loading limit
Standard type	spindle pitch: 0.5mm	Up to approx. 39.2N (4kgf)*
	Spindle pitch: 0.1mm/0.25mm	Up to approx. 19.6N (2kgf)
High-function type	Spindle pitch: 0.5mm	Up to approx. 39.2N (4kgf)
	Spindle pitch: 1.0mm	Up to approx. 58.8N (6kgf)
	Non-rotating spindle	Up to approx. 19.6N (2kgf)
	Series 110 micro-fine feed type (with a differential mechanism)	Up to approx. 19.6N (2kgf)


\* Up to approx. 19.6N (2kgf) only for Ultra small models

### 2. Static load test for micrometer heads (using 148-104/148-103 for this test)


(1) Clamp nut



(2) Split-body clamp

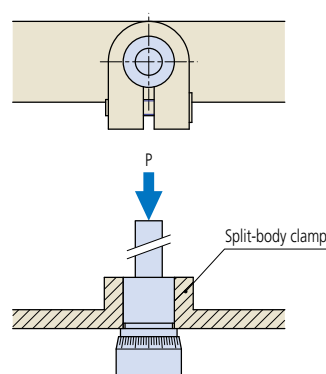

(3) Setscrew clamp



#### Test method

Micrometer heads were set up as shown and the force at which the head was damaged or pushed out of the fixture when a static load was applied, in direction P, was measured. (In the tests no account was taken of the guaranteed accuracy range.)

Mounting method	Damaging / dislodging load*
(1) Clamp nut	Damage to the main unit will occur at 8.63 to 9.8kN (880 to 1000kgf).
(2) Split-body clamp	The main unit will be pushed out of the fixture at 0.69 to 0.98kN (70 to 100kgf).
(3) Setscrew clamp	Damage to the setscrew will occur at 0.69 to 1.08kN (70 to 110kgf).

\* These load values should only be used as an approximate guide.


## Custom-built Products (Product Example Introductions)

Micrometer heads have applications in many fields of science and industry and Mitutoyo offers a wide range of standard models to meet customers' needs. However, in those cases where the standard product is not suitable, Mitutoyo can custom build a head incorporating features better suited to your special application. Please feel free to contact Mitutoyo about the possibilities - even if only one custom-manufactured piece is required.



### 1. Spindle-end types


- Standard




- Spherical




- Pointed




- Spline




- Tapped



- Flanged



- Blade  
(for non-rotating spindle type only)





- Long spindle type is also available. Please consult Mitutoyo.



### 2. Stem types

A custom stem can be manufactured to suit the mounting fixture.



- Plain





- Clamp nut



- Threaded




- Flanged




### 3. Scale graduation schemes

Various barrel and thimble scale graduation schemes, such as reverse and vertical, are available. Please consult Mitutoyo for ordering a custom scheme not shown here.


- Standard




- Reverse




- Vertical




- Reverse vertical



- Offset zero



- Graduations only




Customized micrometer heads can be offered even in one-off quantities. Do not hesitate to contact your nearest Mitutoyo sales office for details.

#### 4. Logo engraving

A specific logo can be engraved as required.

#### 5. Motor Coupling


Couplings for providing motor drive to a head can be designed.




#### 6. Thimble mounting

Thimble mounting methods including a ratchet, setscrew, and hex-socket head screw types are available.


- Ratchet



- Setscrew



- Hex-socket head screw



#### 7. Spindle-thread pitch

Pitches of 1mm for fast-feed applications or 0.25mm for fine-feed can be supplied as alternatives to the standard 0.5mm. Inch pitches are also supported. Please consult Mitutoyo for details.

#### 8. Lubricant for spindle threads

Lubrication arrangements can be specified by the customer.

#### 9. All-stainless construction

All components of a head can be manufactured in stainless steel.

#### 10. Simple packaging

Large-quantity orders of micrometer heads can be delivered in simple packaging for OEM purposes.

#### 11. Spindle and nut (Precision feed screw)

The spindle can be used as a precision feed screw. The nut is machined in accordance with the specified dimensions.

For details, refer to "Precision Feed Screws" on page 45.

#### 12. Accuracy inspection certificate

An accuracy inspection certificate can be supplied at extra cost. For detailed information, contact the nearest Mitutoyo Sales Office.



Coordinate Measuring Machines



Vision Measuring Systems



Form Measurement



Optical Measuring



Sensor Systems

Test Equipment  
and Seismometers

Digital Scale and DRO Systems

Small Tool Instruments  
and Data Management

## Whatever your challenges are, Mitutoyo supports you from start to finish.

Mitutoyo is not only a manufacturer of top quality measuring products but one that also offers qualified support for the lifetime of the equipment, backed up by comprehensive services that ensure your staff can make the very best use of the investment.

Apart from the basics of calibration and repair, Mitutoyo offers product and metrology training, as well as IT support for the sophisticated software used in modern measuring technology. We can also design, build, test and deliver bespoke measuring solutions and even, if deemed cost-effective, take your critical measurement challenges in-house on a sub-contract basis.



Find additional product literature  
and our product catalogue

<http://www.mitutoyo.co.jp/global.html>

Note: Product illustrations are without obligation. Product descriptions, in particular any and all technical specifications, are only binding when explicitly agreed upon.

MITUTOYO and MICAT are either registered trademarks or trademarks of Mitutoyo Corp. in Japan and/or other countries/regions. Other product, company and brand names mentioned herein are for identification purposes only and may be the trademarks of their respective holders.

# Mitutoyo

## Mitutoyo Corporation

20-1, Sakado 1-Chome,  
Takatsu-ku, Kawasaki-shi,  
Kanagawa 213-8533, Japan

T +81 (0) 44 813-8230

F +81 (0) 44 813-8231

<http://www.mitutoyo.co.jp>